

RECOMMENDED PCB LAYOUT

Notes:


Material: Phosphor Bronze(C5191-H)
SIMM Card Connector,With Cover,Type 1,8 Pin

Physical:

Housing: LCP UL 94V-0
Contact: Selective Gold Flash

Specifications:

Voltage Current rating: 1A, 50V AC
Insulation Resistance: 1000Mohm Min
Contact Withstanding Voltage: AC 500V For 1 Minute
Temperteure Rating: -40° To +85°
Packing: 750Pcs/Reel

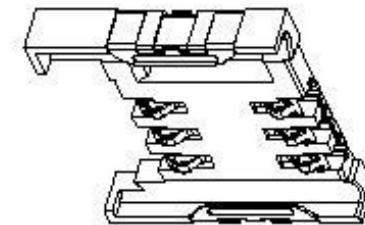

All Connectors

RoHS Compliant

100% RoHS Compliant

100% Lead Free

100% Halogen Free

100% Phosphor Bronze

RoHS Compliant		TOLERANCES ARE
DRAWING BY CY		X ± 0.25
CHECKED BY GENIUS		XX ± 0.15
UNIT/mm	SCALE 1:1	XXX ± 0.10
DATE		ANG ±
SIZE A4	PROJECTION	



ORDER INFORMATION

SCU-W1029X-06-LF

SERIES 180°SMT 06WAY LEADFREE

PCB LAYOUT WIDTH 10.8mm HIGH 2.9mm W/O LOCATING PEG

DESCRIPTION: