

Recommended P.C.B. Layout (Tolerance = ± 0.05)
AS VIEW FROM COMPONENT SIDE

TABLE:

PART NO.	DIM A
SCU-W1025X-06	2.50
SCU-W1026X-06	2.60
SCU-W1027X-06	2.70
SCU-W1028X-06	2.80
SCU-W1029X-06	2.90
SCU-W1030X-06	3.00
SCU-W1031X-06	3.10
SCU-W1032X-06	3.20
SCU-W1036X-06	3.60

NOTES:

1. Electrical specifications:

Contact resistance: 100mOhm max
Voltage rating (SELV): 15Vdc max
Current rating: 1A
Dielectric strength: 500Vrms min. 1min
Insulation resistance: 10E9Ohm min

2. Climatic characteristics:

Operation temperature: -40°C to $+85^{\circ}\text{C}$

3. Mechanical specifications:

Contact force nominal: 20-50cn
Mechanical lifetime: 1,500 mating cycles min
Contact position acc.to GSM

All Connectors


www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettnerstr. 25

RoHS Compliant


DRAWING BY CY
CHECKED BY GENIUS
UNIT/mm SCALE 1:1
DATE
SIZE A4

TOLERANCES ARE

X \pm
.X \pm 0.38
.XX \pm 0.25
.XXX \pm 0.20
ANG \pm



ORDER INFORMATION

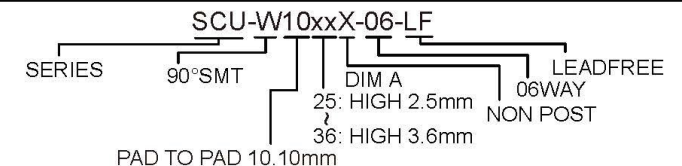

DESCRIPTION: SIM CARD CONNECTOR Wingblack type 6pin