

MATERIALS

1. HOUSING: HI-TEMP. (UL 94V-0) BLACK.
 2. TERMINAL: COPPER ALLOY (T=0.15mm), GOLD PLATED OVER NICKEL.

3. COVER: STAINLESS STEEL (T=0.2mm)

SPECIFICATION


1. CURRENT RATING: 1.0 A. MAX

2. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S. FOR ONE MINUTE.

3. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.

4. CONTACT RESISTANCE: 30mΩ MAX

5. OPERATING TEMPERATURE: -40°C TO +85°C

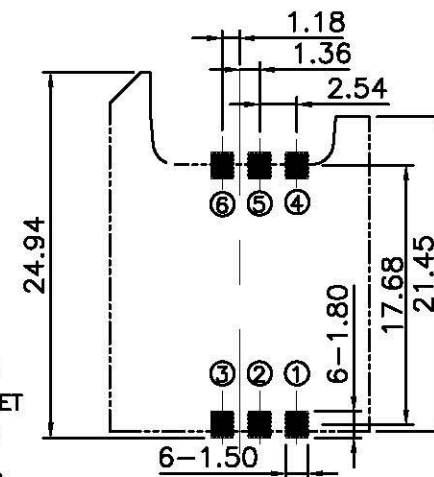

- ① VCC
- ② RESET
- ③ CLK
- ④ GND
- ⑤ VPP
- ⑥ I/O


RECOMMEND P.C.B LAYOUT
 TOLERANCE ± 0.05
 TOP VIEW

RoHS Compliant

All Connectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0349 711 7009503 Fax: 0349 711 7009504
 70704 Tübingen - Germany Kettnerstr. 25

DRAWING BY CY		TOLERANCES ARE X ± 0.30 .XX ± 0.25 .XXX ± 0.20 ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

SCV-W1718X-06-LF
 SERIES | | | LEADFREE
 | | | 06 WAY
 90° SMT | | | NON POST
 | | | HIGH 1.80mm
 | | | PAD TO PAD 17.68mm

DESCRIPTION: SIM Card Socket Hinge Type H:1.8mm