


Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 250VAC
 Contact Resistance: 100mΩ Max
 Operating Temperature: -40°C to +85°C
 Max Process Temp: 200°C for 20~30 sec.
 (230°C for 10~15seconds)

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon6T Or Equivalent material(Housing 1)
 Nylon 46 Or Equivalent material(Housing 2)

Recommended P.C.Board
 Layout
 (Tolerance: ±0.05)

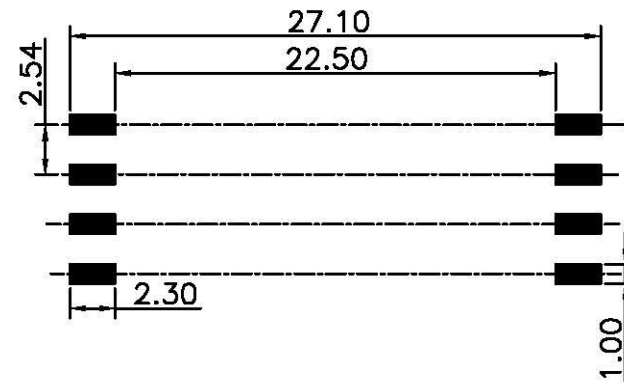

RoHS Compliant

All Connectors

www.allconnectors.de
 Tel.: 0049 711 7006503
 70794 Filzdesloch Germany

info@allconnectors.de
 Fax: 0049 711 7006001
 Kellernstraße 25

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE

X ± 0.30
 X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±



ORDER INFORMATION

SCV-W2425X-08-LF
 SERIES | | | LEADFREE
 90°SMT | | | 08 WAY
 | | | NON POST
 | | | HIGH 2.54mm
 | | | PAD TO PAD 24.80mm

DESCRIPTION: