

RECOMMEND P.C.B. LAYOUT  
TOP VIEW

## NOTES

### \*Material:

- 1.Body: LCP UL 94V-0 Rated, Color:Black;
- 2.Cover: LCP UL 94V-0 Rated, Color:Black;
- 3.Contact: Phosphor Bronze;
- 4.Contact Plating: Gold Plating Over Nickel on Contact Area, Tin/Lead Plating on Terminal.

### \*Specification:

- 1.Current Rating: 0.5 AMP. Max.;
- 2.Dielectric Withstanding Voltage: 500V AC R.M.S for One Minute;
- 3.Insulation Resistance: 1000 M Ohms Min. AT 500V AC;
- 4.Contact Resistance: 30 M Ohms Max.;
- 5.Operating Temperaturd: -25°C to +85°C;
- 6.Processing Temp: 230°C for 30~60 Seconds MAX.;
- 7.Durability: 5000 Cycles.

**All Connectors**

www.allconnectors.de  
Tel.: 0049 711 7009503  
70794 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kettnerstr. 25

**RoHS Compliant**

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT/ mm SCALE 1:1  
DATE  
SIZE A4

TOLERANCES ARE


X ± 0.30  
X ± 0.30  
.XX ± 0.20  
.XXX ± 0.20  
ANG ± 1°

PJECTION



ORDER INFORMATION

SCV-W2523P-08-LF

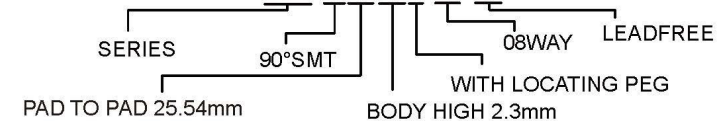

DESCRIPTION: SIM CARD 08 PIN SOCKET