

TECHNICAL CHARACTERISTICS

1. General Characteristics

Dimension: 29.65L x 17.20W x 3.00H mm
 Weight: Approx. 1.43 g
 Contact principle: Friction technology
 Operating position: Shaft up / Down / Horizontal
 Mounting System: SMT Type (post optional)
 Durability: 10,000 cycles min.

2. Mechanical Characteristics

Insulation material: Thermoplastic, UL 94V-0
 RoHS Directive 2002/95/EC Compliant

3. Electrical Characteristics


Number of contacts: 6, 8 pins (optional)
 Contact resistance: 50 m typical, 100 m max.
 Insulation resistance: >1000 M / 500 VDC
 Switch Type: Blade
 Operation: Normally Open

4. Solderability


Wave: Not applicable
 IR reflow: 260 C, 10 sec. Max.
 Manual soldering: 360 C, 3 sec. Max.

5. Environmental Characteristics

Operating temperature: - 40 C ~ + 85 C
 Operating humidity: 10 % ~ 95 % RH
 Storage temperature: - 40 C ~ + 85 C
 Storage humidity: 10 % ~ 95 % RH

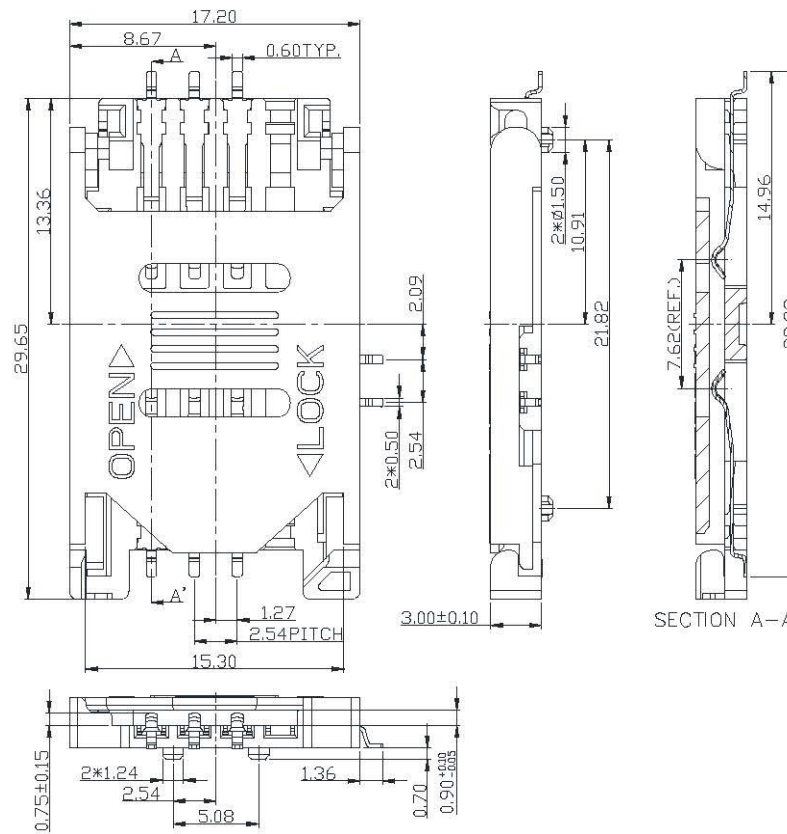

Unit: mm; Tolerances: 0.15 mm
Mechanical outline dimension

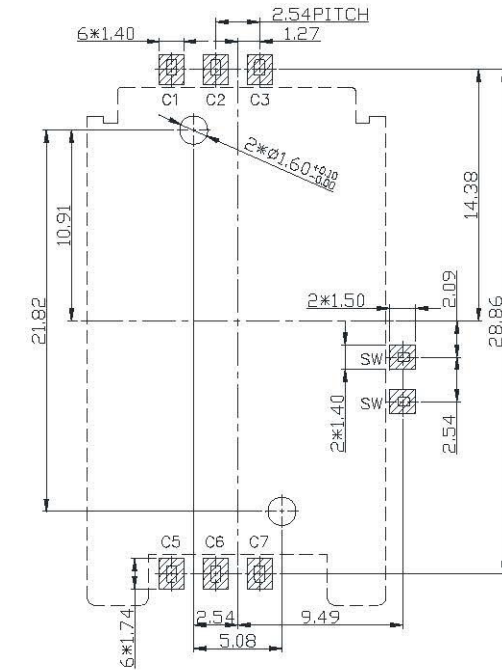

Unit: mm; Tolerances: 0.05 mm
Reference dimension for PCB layout

RoHS Compliant


Allconnectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0415 411 400308 Fax: 0415 411 400304
 70794 Filberstadt, Germany Rottmersloh 25

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

TOLERANCES ARE

X ±
 X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

SCV-W2830PB-06-LF
 SERIES | | | LEADFREE
 90°SMT | | | 06WAY
 PAD TO PAD 28.86mm | | | OPEN SWITCH
 WITH LOCATING PEG
 HIGH 3.0mm

DESCRIPTION: