


PCB LAYOUT

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 TERMINAL: COPPER ALLOY,
 PLATING: CONTACT AREA GOLD PLATED
 SOLDER AREA TIN PLATED

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

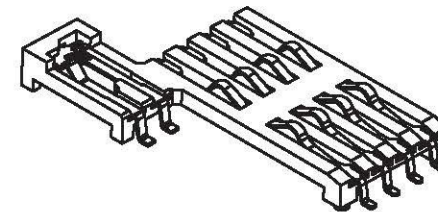

SCY-W24xxPB-08-LF
 LEADFREE

H" DIM
 14:1.4mm
 30:3.0mm
 35:3.5mm
 42:4.2mm
 47:4.7mm

RoHS Compliant

Allconnectors

www.allconnectors.de
 Tel.: 0049 711 7009800
 70794 Filderstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7009804
 Kettenweg 25

PART NO. SCY-W24xxPB-08

DWG NO. SCY-W24xxPB-08

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG

DESCRIPTION:			
AREA	REVISIONS		DATE