
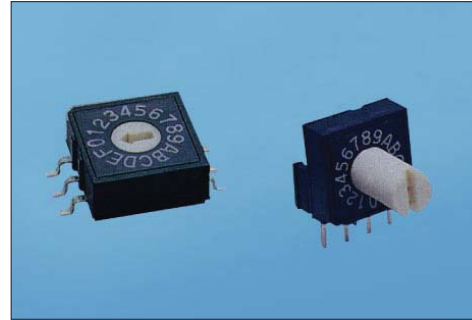





SPECIFICATIONS

CONTACT RATING: 24VDC, 25mA (switching Rating)
 50VDC, 100mA (non-switching Rating)
 ELECTRICAL LIFE: Contact Resistance.
 200mΩ max. 20,000 cycles.
 CONTACT RESISTANCE: 100 mΩ max. (initial)
 INSULATION RESISTANCE: 100 MΩ min. at 250 VDC
 OPERATION FORCE: (200gf.cm) max


STORAGE TEMPERATURE: -40°C to 85°C
 SOLDERABILITY: 230±5°C 3±sec. 75%
 SOLDER RESISTANCE: Automatic Soldering
 HUMIDITY: 40±2°C 90~95% RH for 96 hours.
 THERMAL TEST: 85±2°C FOR 96 hours
 COLD TEST: -40°C±2°C for 96 hours

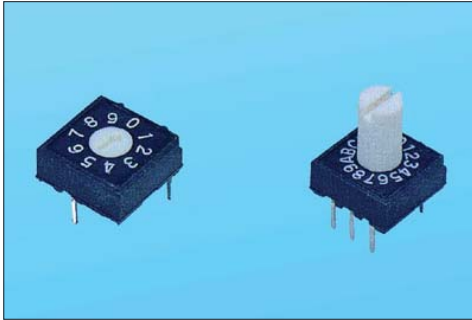

DIMENSIONS

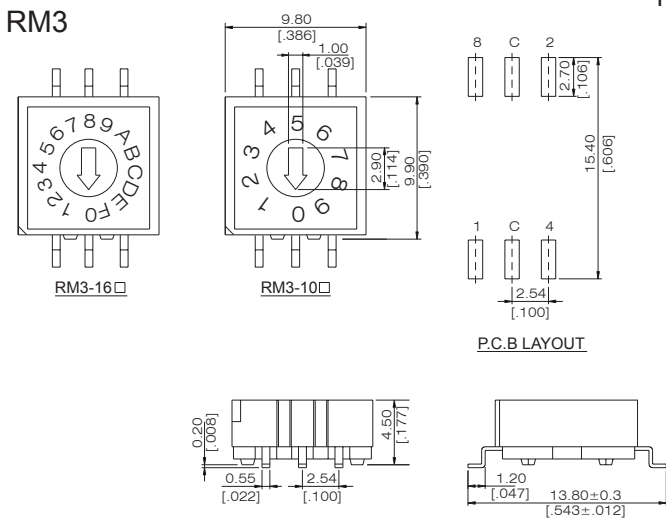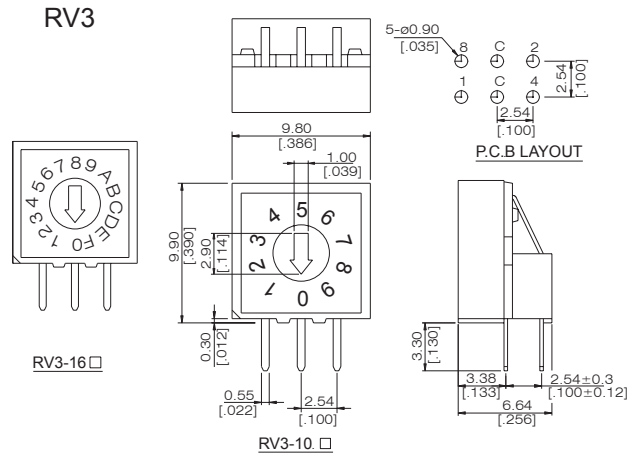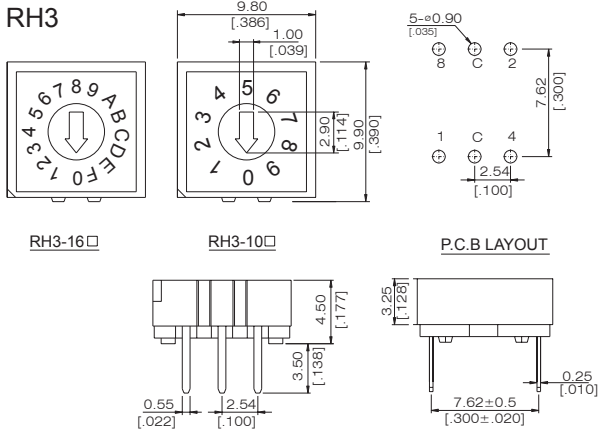

HOW TO ORDER

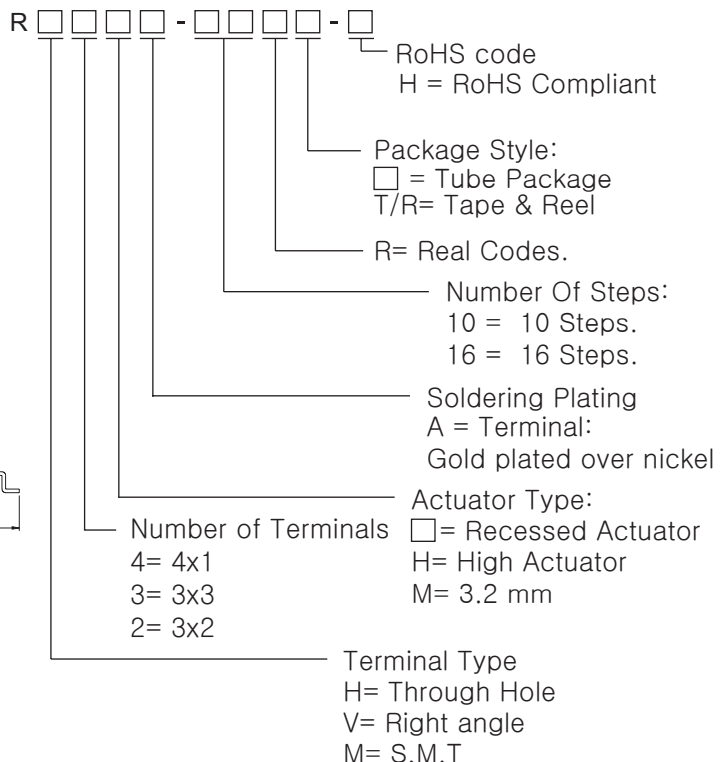

INDEX
TOGGLE
ROCKER
SLIDE
PUSH-BUTTON
DIP
TACT