

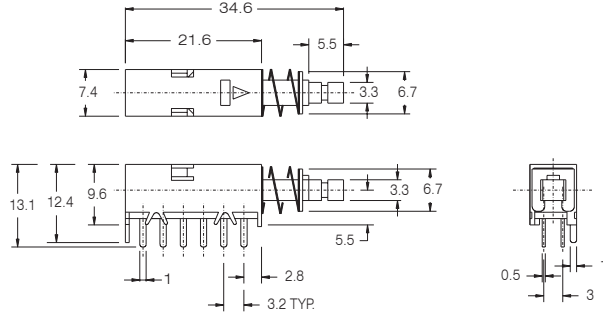
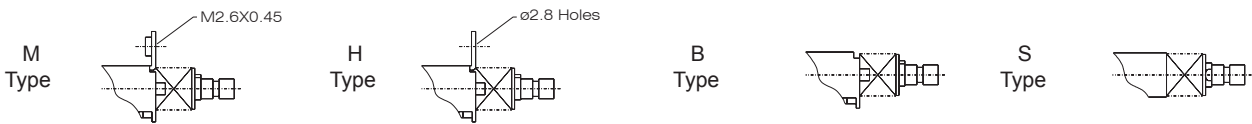


**WPM**

**SPECIFICATIONS**

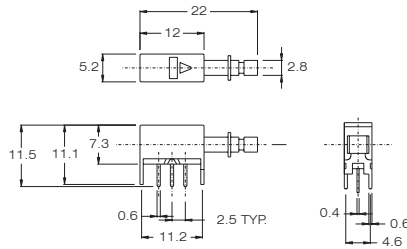
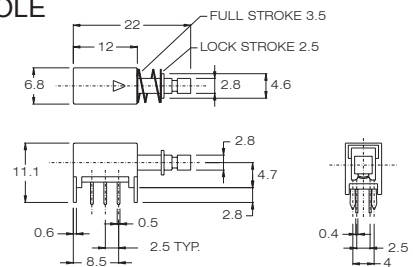
RATING : 30V DC, 0.3A  
 CONTACT RESISTANCE : 50mΩ max. (WPM), 30mΩ max. (WPMS)  
 INSULATION RESISTANCE : 500V DC-100MΩ min  
 WITH STANDARD VOLTAGE: 500V AC-1minute  
 LIFE CYCLE: 10,000 cycles  
 OPERATING TEMPERATURE RANG: -20°C~+70°C

**POLE**
**2 POLE**

**4 POLE**

**FRAME TYPE**

**TERMINAL TYPE**

Terminal for lead wiring	Terminal for printed circuit	Shaft end style
<b>W Type</b> 	<b>P Type</b> 	


OPERATION:  
 L = LOCK  
 N = NON LOCK

**WPMS**

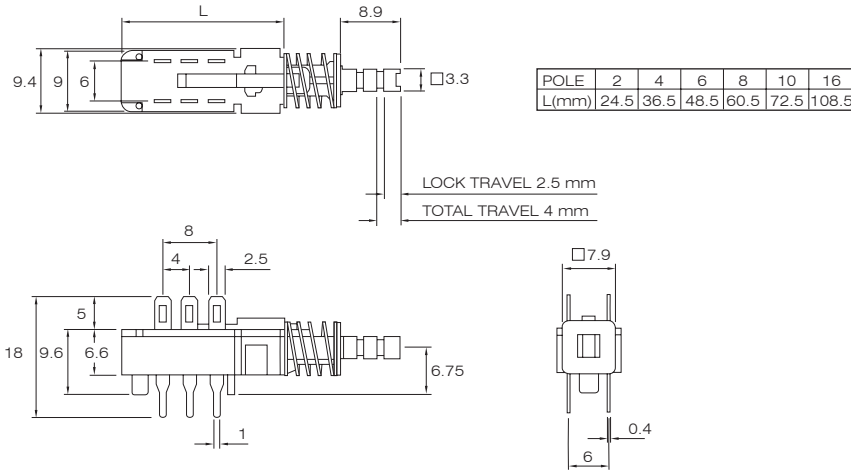






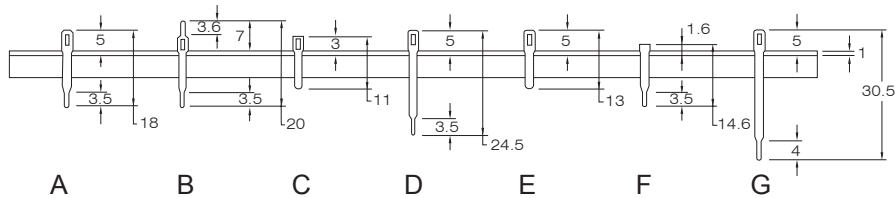
**POLE  
1 POLE**

**2 POLE**

**HOW TO ORDER**

SERIES [ ] — FRAME [ ] — POLE [ ] — TERMINAL [ ] — OPERATION [ ] — KNOB [ ] — RoHS code [ ]

H = RoHS Compliant


**SPECIFICATIONS**

RATING : AC 0.2A/125V DC 1A/25V  
 CONTACT RESISTANCE : 40mΩ max  
 INSULATION RESISTANCE : 100MΩ min at 500V DC  
 OPERATING FORCE: 350 ± 150gf (2P2T~8P2T)  
                   600 ± 150gf (10P2T, 16P2T)  
 OPERATING TEMPERATURE RANGE : -20°C ~ +70°C  
 OPERATING LIFE:10,000 cycles.

**DIMENSION**

**SCHEMATIC**

**P.C.B. LAYOUT**

**FRAME TYPE**
**S TYPE**

**H TYPE**

**M TYPE**

**C TYPE**

**TERMINAL TYPE**


OPERATION	L: LOCK	IL: INTERLOCK	TIMING	S: SHORTING	TRAVEL	2: 2.5mm
	N: NONLOCK	R: RESET		N: NONSHORTING		4: 4mm

**HOW TO ORDER**


H = RoHS Compliant