


Approval	UL	CE
Electrical		
Standard	UL	IEC
Rated voltage	125V	130V
Rated current	4A	10A
With standing voltage	AC1250V/1Min	
Mechanical		
Ambient temperature	-40°C~+140 °C	
Dimensions		
Pitch	2.5(.098")	
Poles	2P-12P	
Material		
Housing	PA4 6,UL94 V-0	
Pin header	Copper, Tin plated	

### HOW TO ORDER :

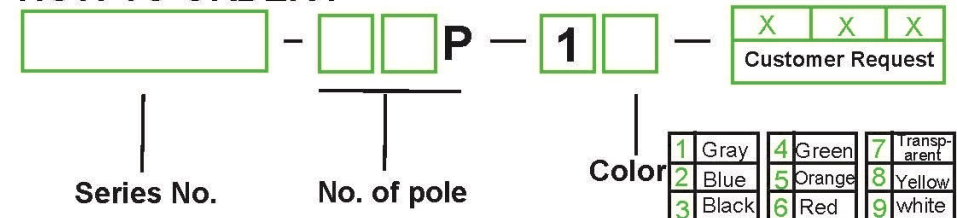

mm (INCH)	<b>DEGSON ELECTRONICS CO., LTD.</b>
THROANGLE PROJECTION	NAME <b>15EDGRC-THR-2.5</b>