

Technical Data:

Material:



- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)
(UL94V-0)

Electrical


- Voltage rating: 125VAC
- Current rating: 8A
- Insulation resistance: 500MΩ at DC 500V
- Withstanding Voltage: AC 1200V(1min)

Mechanical:


- Using temperature Range: -40°C to +105°C
- Soldering temperature: +250°, 5seconds Max.

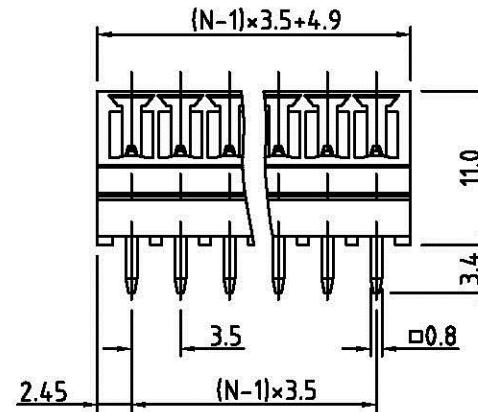

N=Number of contacts



P.C.B LAYOUT

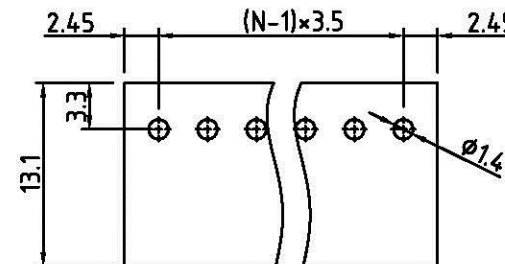

TBH035-PAC-06-LF

LEADFREE

RoHS Compliant

B	All Connectors		PART NO. TBH035-PAC-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.3 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:			
	www.allconnectors.de Tel.: 0049 711 7009503 79794 Filzbergstadt - Germany		info@allconnectors.de Fax: 0049 711 7005904 Katzemerstr. 25							
A	FILE NO.		UNIT / mm		SCALE 1:1	PROJECTION	AREA	REVISIONS	HK	DATE