


N= Number of concats

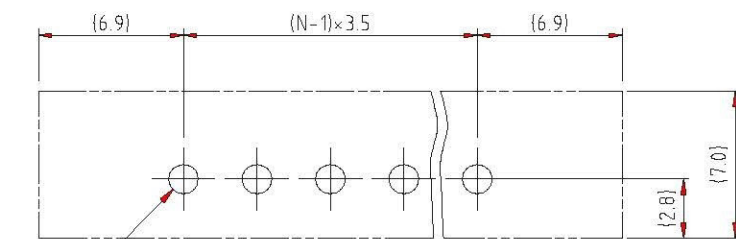

RECOMMENDED PCB LAYOUT

Material

- Terminal body (contact pin): Brass(CuZn) Tin plated
- With flange nut: Brass M2.5
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/CSA

- Voltage rating: 300VAC/125VAC
- Current rating: 10A/8A
- Wire range:
- Solid wire(AWG):
- Stranded wire(AWG):
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 245°C±10°C/5 Sec
- Safety Approval:

TBH035-PDCF-xx-LF

LEADFREE

RoHS Compliant

**Allconnectors**

www.allconnectors.de  
Tel.: 0019 711 7009008  
70794 Ellersriedl Germany

info@allconnectors.de  
Fax: 0019 711 7009004  
Ellersriedl, 75

PART NO. TBH035-PDCF-xx

DWG NO. TBH035-PDCF-xx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
.XX ± 0.1  
.XXX ±  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE