Technical Data:

Material:

- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

- Voltage rating: 125VAC
- Current rating: 8A.
- Insulation resistance: 500MΩat DC 500V
- Withstanding Voltage: AC 1200V(1min)

Mechanical:

- Using temperature Range: -40°C to +105°C
- Soldering temperature:+250°,5seconds Max.

Safety approvol deta:

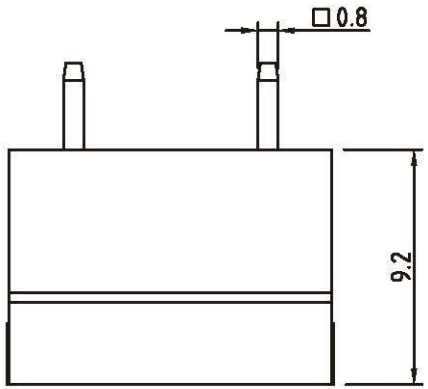

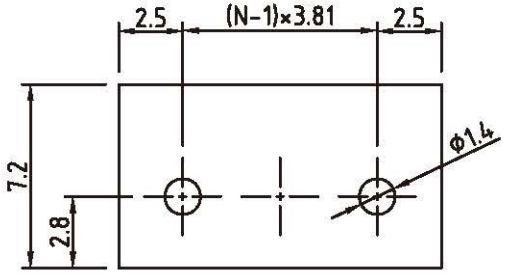

P.C.B. LAYOUT

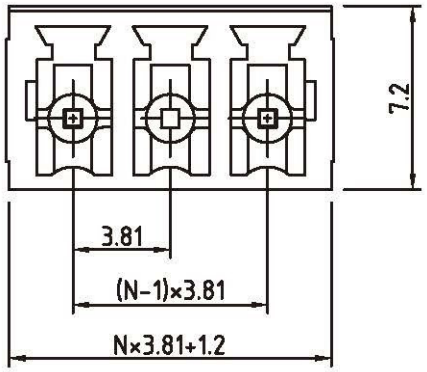

N=Number of contacts

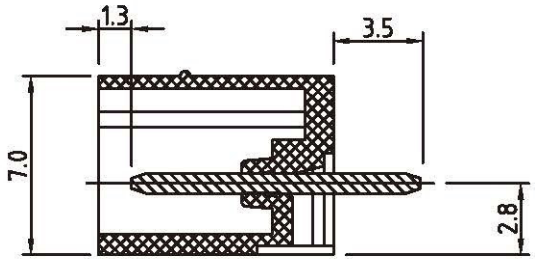

RoHS Compliant

AllConnectors

www.allconnectors.de info@allconnectors.de

Tel.: 0049 711 7009508 Fax: 0049 711 7006504

70794 Filderstadt - Germany Kettemerstr. 25

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

TBH038-PDCEE-xx-LF

- SERIES
- MALE
- CAGE DIP 180°
- EMPTY EVEN PIN
- 02~24WAY
- LEADFREE

DESCRIPTION: