
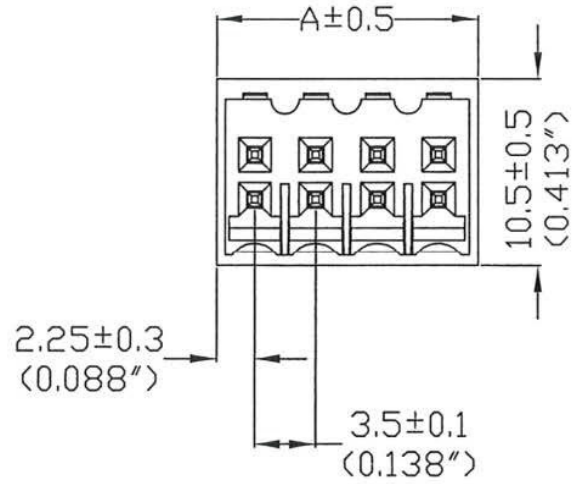
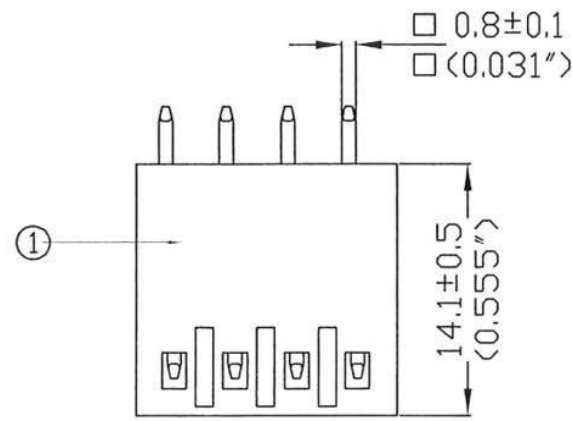
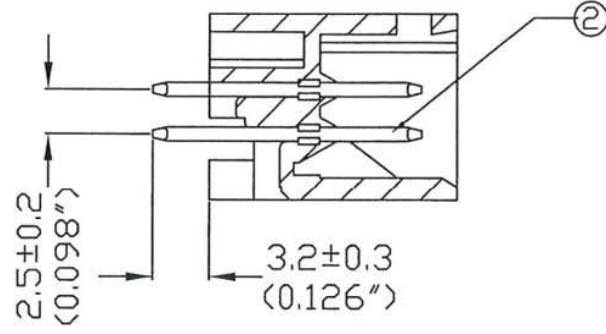


# PCB Layout

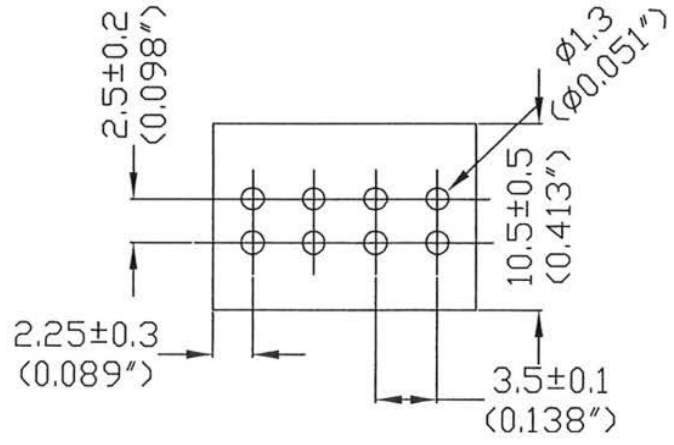

Current rating : 5Amp AC150V  
 Insulation withstands volt : AC2000V min  
 Insulation resistance : >2000MΩ DC500V  
 Operation temperature : -40°C to +105°C

Pitch: 3.5mm (0.138in)					
Poles	A(mm)	A(in)	Poles	A(mm)	A(in)
4	8.0	0.315	24	43.0	1.693
6	11.5	0.453	26	46.5	1.831
8	15.0	0.591	28	50.0	1.969
10	18.5	0.728	30	53.5	2.106
12	22.0	0.866	32	57.0	2.244
14	25.5	1.004	34	60.5	2.382
16	29.0	1.142	36	64.0	2.520
18	32.5	1.280	38	67.5	2.657
20	36.0	1.417	40	71.0	2.795
22	39.5	1.555			

TBX035-PDB-2X<sub>xxx</sub>-LF  
 2X02:04WAY LEADFREE  
 2X20:40WAY

RoHS Compliant

**All Connectors**  
 www.allconnectors.de  
 info@allconnectors.de  
 Tel.: 0049 711 7009503  
 Fax: 0049 711 7009504  
 70771 Filberstadt - Germany  
 Kettnerstr. 25

PART NO. TBX035-PDB-2X<sub>xxx</sub>  
 DWG NO. TBX035-PDB-2X<sub>xxx</sub>

CHECKED BY CY  
 DRAWING BY

TOLERANCES ARE  
 X ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG

DESCRIPTION:			
AREA	REVISIONS	DATE	

FILE NO.  
 UNIT / mm  
 SCALE 1:1  
 PROJECTION