
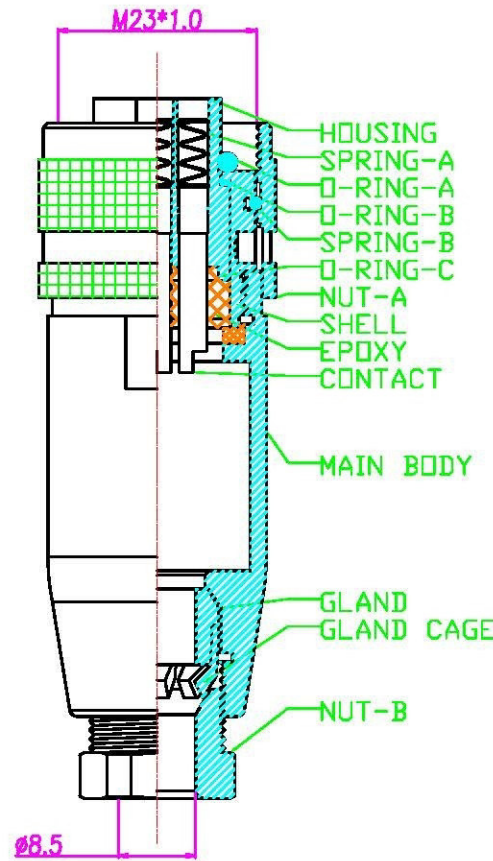
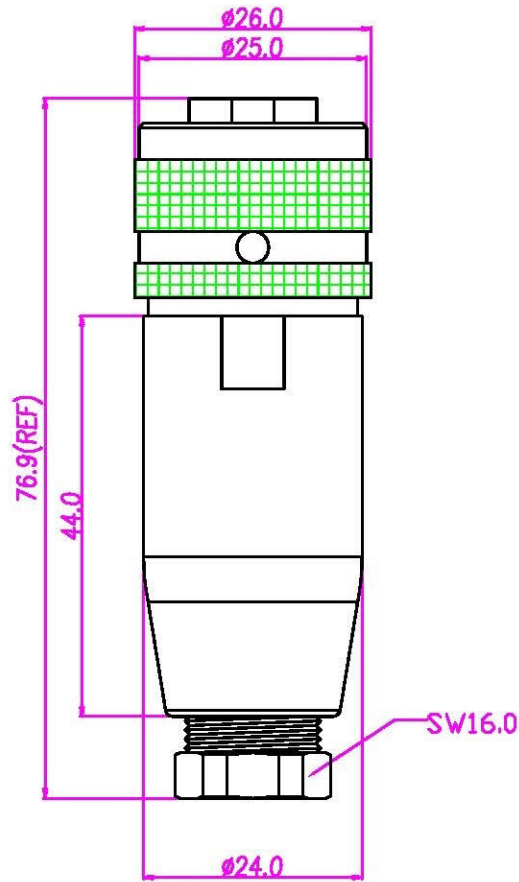


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

# CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Veng	25/11/11'	
B				
C				



- MATERIAL :**
  - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK.
  - 1-2. SPRING-A : PHOSPHOR BRONZE.
  - 1-3. O-RING-A : EPDM ; COLOR : BLACK.
  - 1-4. O-RING-B : SILICONE ; COLOR : BLACK.
  - 1-5. SPRING-B : STAINLESS STEEL.
  - 1-6. O-RING-C : SILICONE ; COLOR : BLACK.
  - 1-7. NUT-A : BRASS.
  - 1-8. SHELL : BRASS.
  - 1-9. Epoxy Base : EF400A&EF400B. COLOR : BLACK.
  - 1-10. CONTACT : BRASS.
  - 1-11. MAIN BODY : ALUMINUM ALLOY.
  - 1-12. GLAND : SILICONE COLOR : BLACK.
  - 1-13. GLAND CAGE : POM ; COLOR : WHITE.
  - 1-14. NUT-B : ALUMINUM ALLOY.
- FINISH :**
  - 2-1. SPRING-A : MATTE TIN.
  - 2-2. NUT-A : SATING NICKEL PLATED OVER ALL
  - 2-3. SHELL : SATING NICKEL PLATED OVER ALL
  - 2-4. CONTACT : 30 MICRO INCHES MIN. GOLD PLATED.
  - 2-5. MAIN BODY : SATING NICKEL PLATED OVER ALL
  - 2-6. NUT-B : SATING NICKEL PLATED OVER ALL
- ELECTRICAL SPECIFICATION :**
  - 3-1. Rated current : 20A
  - 3-2. Rated oltage : 250V
  - 3-3. Water proof: IP67
- Environmental :**
  - 4-1. Operation Temperature : -40°C~85°C

DRAWN	Ku Chou	APP'D	Enly Suen	UNIT	mm	TOLERANCE		TITLE	M23 5PIN (F) Assembly type			SHEET
CHK'D	Enly Suen			SCALE	1:1	.x ±0.25 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°		PART NO.	WP-05F2-65	DWG NO.	QC5642	VERSION A
www.allconnectors.de Tel: 0049 711 7002503 70794 Filberstraße - Germany							info@allconnectors.de Fax: 0049 711 7002504 Kettnerstr. 25					