

1

2








3

4

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Suitable Cable  $\varnothing$ D=21mm To 24mm
- 3. Recommend Gland Nut Torque: 15~20 Kgf-cm.
- 4. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0	ECN-130105	Mass Production	Lucas 01/10/13	Ray 01/10/13	Ray 01/10/13

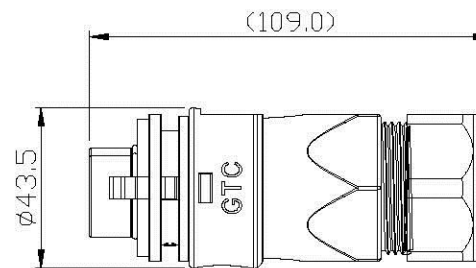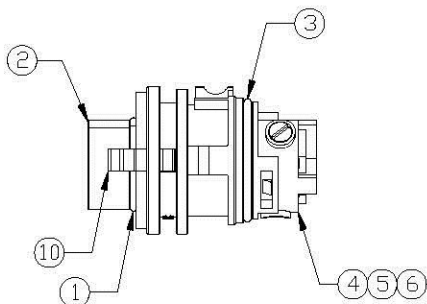

10	Clamp	Thermoplastic Color: Red	1
9	Gland Nut	Thermoplastic Color: Black	1
8	Gland	NBR Color: Black	1
7	Cover	Thermoplastic Color: Black	1
6	Machine Screw	SS5C Finish: Ni Plated	3
5	Fixed lid Male 3P	Thermoplastic Color: Black	1
4	Contacts	Copper Alloy Finish: Ni Plated	3
3	O-ring	Silicone Color: Red	1
2	Housing	Thermoplastic Color: Black	1
1	O-ring	Silicone Color: Red	1
Item	Part Name	Material / Finish	Qty

TITLE						DRAWING NUMBER			REV.	
Power M35 41A 3P Field Installable Cable End Male Screw-in Push Lock						GT1E1411-42032			A0	

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
	B	1:1	Lucas 06/14/12	Ray 06/14/12	Ray 06/14/12	X.X ± 0.5 X.XX ± 0.2	mm	1/1
						X.XXX ± 0.05 ANGLES ± 1°		

**Allconnectors**  
 www.allconnectors.de info@allconnectors.de  
 Tel: 0049 711 7009502 Fax: 0049 711 7009504  
 70794 Ellwangen, Germany kettl@evs.de

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO., LTD. THE POSSESSOR AGREES TO THE FOLLOWING:  
 (1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (2) NOT TO REPRODUCE OR COPY IT  
 (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (4) ALL RIGHTS RESERVED

1

2

3

4