

### Specification of connector


General Characteristics  
 Locking system : snap-in  
 Termination : crimp moulded  
 Shell protection : IP67  
 Upper temperature : 105°C  
 Lower temperature : -40°C

Electronical Characteristics  
 Rated voltage : 250V  
 Rated current : 5A  
 Contact resistance : ≤ 10mΩ  
 Insulation resistance : >10M Ω

Materials  
 Pin contact : brass  
 Contact plating : gold  
 Male insert : nylon  
 Ring nut : nylon

### Specification of cable

|                |     |     |
|----------------|-----|-----|
| Matrial Jacket | PVC | PUR |
|----------------|-----|-----|

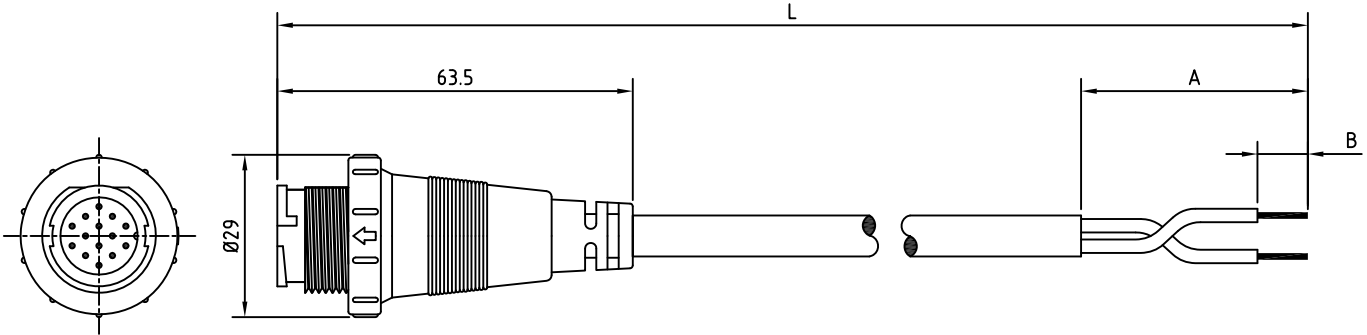

RoHS  
 LEAD FREE

**Allconnectors**

www.allconnectors.eu | info@allconnectors.eu  
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

|      |                           |      |            |          |        |
|------|---------------------------|------|------------|----------|--------|
| ITEM | CIRCULAR CONNECTOR TYPE C | DATE | 10-21-2010 | PART NO. | D212M1 |
|      |                           | DWN  | GINA       | REV.     | 0      |
|      |                           | CHK  | KATY       |          |        |
|      |                           | UNIT | MM         |          |        |

NOTE: REV.0 NEW