


RoHS
IP67

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/15/2010

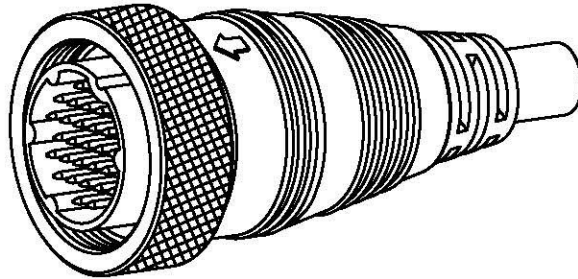

NOTES:

1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C




DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

2. HOW TO ORDER: CEx-M4xxSM

31 - 31PIN
37 - 37PIN

N - CURRENT RATING 2A
D - CURRENT RATING 5A

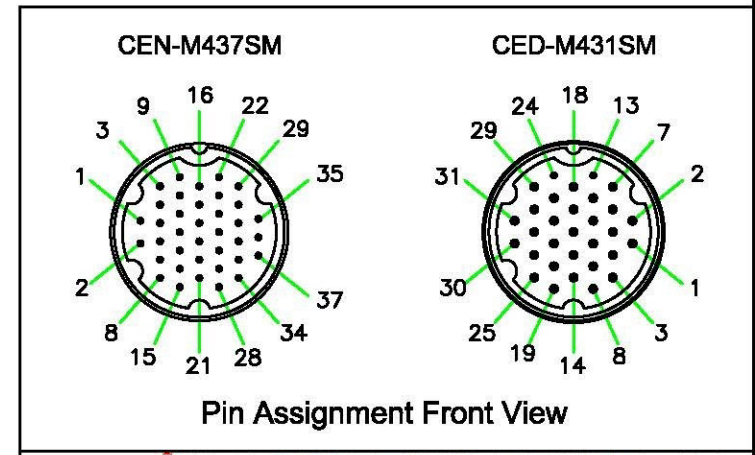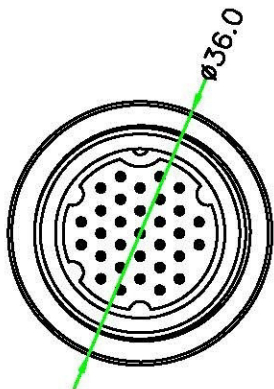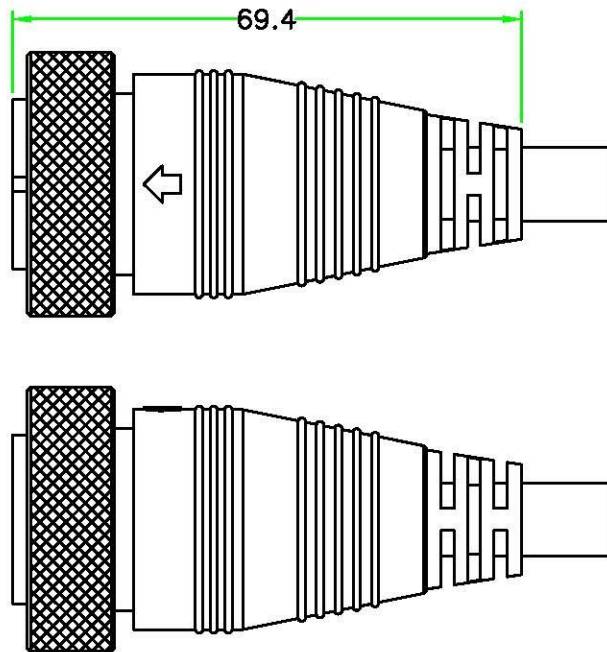

Pin Assignment Front View

Allconnectors

www.allconnectors.de
Tel.: 0049 711 7005503
70/2911 Hilderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7005504
Kellenmeisterstr. 25

5	GLUE	Glue.	BLACK	1	
4	O-RING	SILICON.		1	O-2215-SB
3	SCREW NUT	BRASS, NICKEL PLATED.		1	CEA-LN (138-135)
2	CONTACT	BRASS. Male Pin. 6u" Gold Plated. Solder Cup.		N	
1	CONNECTOR	Circular E Size Connector Insert. NYLON+GF.	BLACK	1	CED-31FMC (45-135-N8-2)
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

	UNIT: mm	TITLE : Circular E Size Female Connector Male Pin Lock type Solder Bucker Metal Screw Nut Cable Molding Connector	
SCALE	1:1	P/N: CEx-M4xxSM	DR. Jack
UNLESS OTHERWISE SPECIFIED TOLERANCES: x ±0.25 xx ±0.1 xxx ±0.05 ANGLE ±1°X			CH. ssa.n.eey
REV. A	SHEET 1/1	DWG.NO: CEx-M4xxSM	AP.