

4

3


2

1



⚠ Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IPX7(Mating).
2. Cable Diameter: 3.5 to 4.0 mm
3. Cover Torque:  
2.5 to 3.0 Kg-cm Tightening Torque.
4. Gland Nut Torque:  
6.5 to 7.0 Kg-cm Tightening Torque.
5. RoHS Compliance.

REV	ECN#	DESCRIPTION OF REVISION	
A0		Mass Production	043010
A1	ECN-100609	Marked ⚠	061010

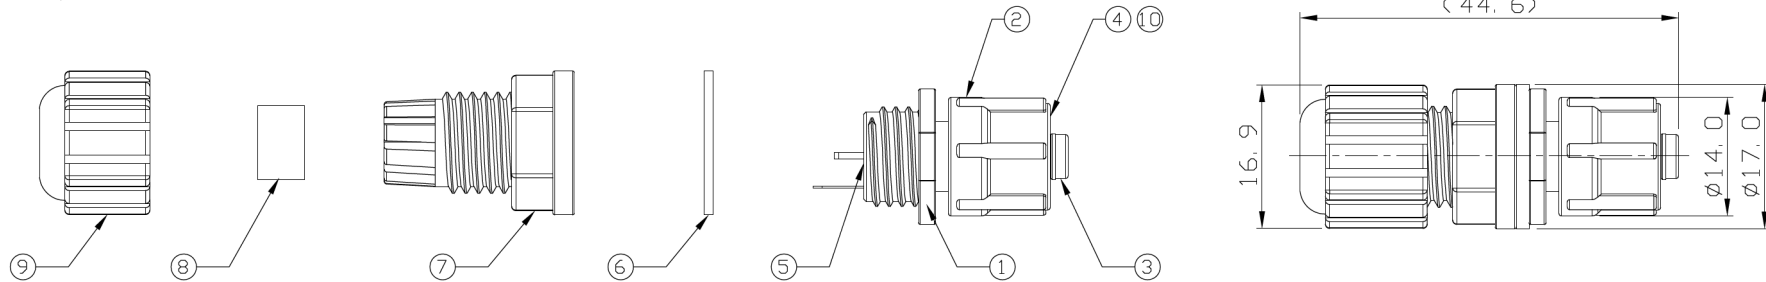

Item	Part Name	Material/Finish	Q'ty
1	Housing	Thermal Plastic Color: Black	1
2	Screw Nut	Thermal Plastic Color: Black	1
⚠ 3	DC Plug	Insulator: Thermal Plastic Color: Black	1
		Neg. Terminal: Copper Alloy Finish: Ni Plated	1
		Pos. Terminal: Copper Alloy Finish: Ni Plated	1
4	O-Ring	Silicone Black: Red	1
5	Glue	Epoxy Color: Black	
6	Gasket	EPDM Color: Black	1
7	Cover	Thermal Plastic Color: Black	1
⚠ 8	Gland	NBR Color: Black	1
9	Gland Nut	Thermal Plastic Color: Black	1
⚠ 10	C-Ring	SWB Finish: Zn Plated	1

METRIC			
DRAFTER	DATE	 www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25	
Lucas	06/10/10		
APPROVED	DATE	TITLE DC Plug Field Installable, 2.5mm Plug Solder, Screw	
Ray	06/10/10		
DIMENSIONS ARE IN MILLIMETER TOLERANCES		DRAWING NUMBER GT1B0202	
X.X	$\pm 0.5$		
X.XX	$\pm 0.20$	SCALE 1:1	
X.XXX	$\pm 0.05$		
ANGLES	$\pm 0.5^\circ$		
DO NOT SCALE DRAWINGS			
 THIRD ANGLE PROJECTION		SIZE B	

4

3

2