REV.	Description	Date

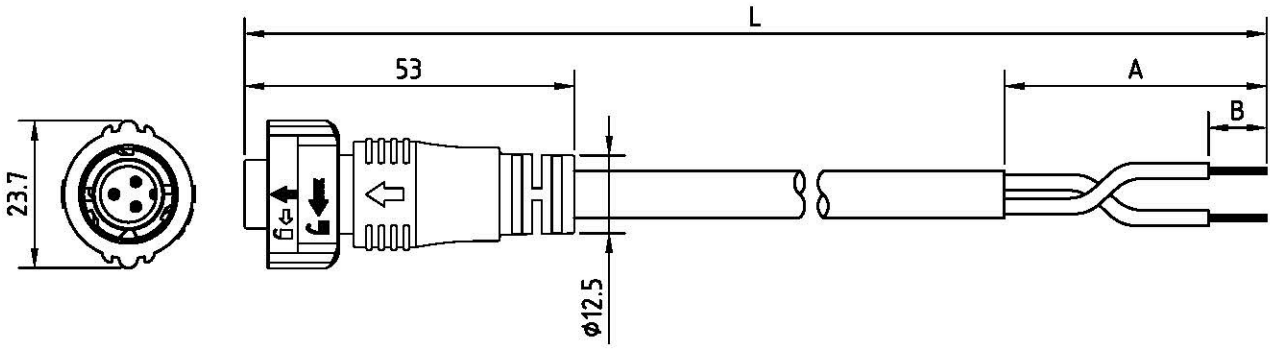

Specification of connector

Locking system	: Quick Push Lock
Termination	: solder
Shell protection	: IP68
Contact resistance	: <10mΩ
Insulation resistance	: >10MΩ

Materials

Pin contact	: brass
Contact plating	: gold
Male insert	: PA
Ring nut	: PA

Specification of cable

Material Jacket	PVC	PUR

RoHS

CONTACT ARRANGEMENT FRONT VIEW (MALE)	2P	3P	4P	5P	6P	7P	8P
Rated voltage	250V		250V		60V		
Rated current	10A		5A		5A		

All Connectors
www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany
info@allconnectors.de
Fax: 0049 711 7009504
Kettemerstr. 25

DATE	2019/12/17	PART NO.	D363M1-XP
DWN	GINA	REV.	0
CHK			
ITEM	Type J(J1): male conn. 2-8P	UNIT	MM		