


Recommended  
Panel cut-out

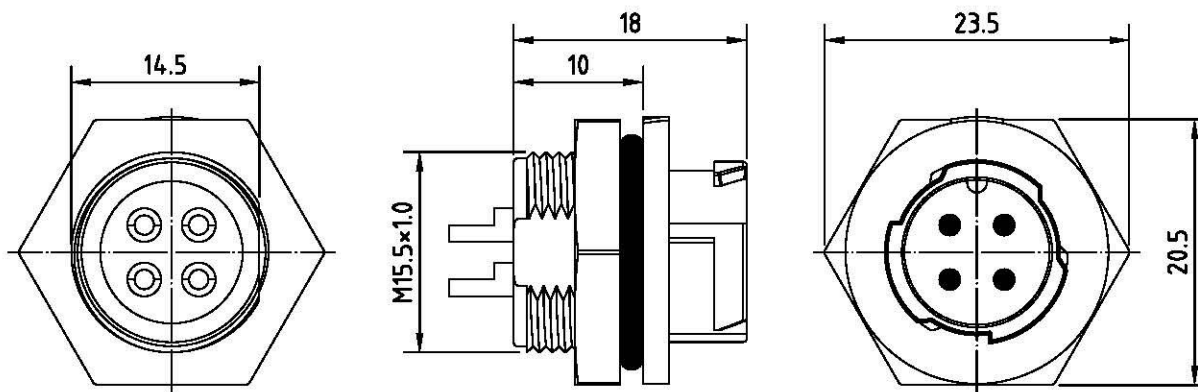

| REV. | Description | Date |
|------|-------------|------|
|      |             |      |

### Specification of connector

Locking system : Quick Push Lock  
 Termination : solder  
 Shell protection : IP68  
 Contact resistance : <10mΩ  
 Insulation resistance : >10MΩ

RoHS  
 TOLERANCE X±0.5 .X±0.3

| CONTACT ARRANGEMENT FRONT VIEW (MALE) | 2P   | 3P | 4AP | 4BP  | 5P | 6P  | 7P | 8P |
|---------------------------------------|------|----|-----|------|----|-----|----|----|
| Rated voltage                         | 250V |    |     | 250V |    | 60V |    |    |
| Rated current                         | 10A  |    |     | 5A   |    | 5A  |    |    |

| 4    | Nut         | PA       |                |
|------|-------------|----------|----------------|
| 3    | O ring      | Rubber   |                |
| 2    | Pin         | Brass    | Gold plated    |
| 1    | Body        | PA       |                |
| Item | Description | Material | Treat & Remark |

**Allconnectors**

www.allconnectors.de  
 Tel.: 0049 711 7009503  
 70794 Filderstadt - Germany

info@allconnectors.de  
 Fax: 0049 711 7009504  
 Kettnerstr. 25

|      |            |          |            |
|------|------------|----------|------------|
| DATE | 2019/12/17 | PART NO. | SD363F2-XP |
| DWN  | GINA       | REV.     | 0          |
| CHK  |            |          |            |
| UNIT | MM         |          |            |

|      |                             |
|------|-----------------------------|
| ITEM | Type J(J2): male conn. 2-8P |
|------|-----------------------------|