

### Specification of connector

**General Characteristics**

- Locking system : screw M10.5
- Termination : lathe/crimp, moulded
- Shell protection : IP67
- Upper temperature : 105°C
- Lower temperature : -40°C

**Electronical Characteristics**


- Rated voltage : 250V
- Rated current : 2A
- Contact resistance : ≤ 10mΩ
- Insulation resistance : >10M Ω

**Materials**

- Pin contact : brass
- Contact plating : gold
- Male insert : PA( nylon)
- Ring nut : nickel plated
- O-ring : rubber

### Specification of cable

Matrial Jacket	PVC	PUR
----------------	-----	-----

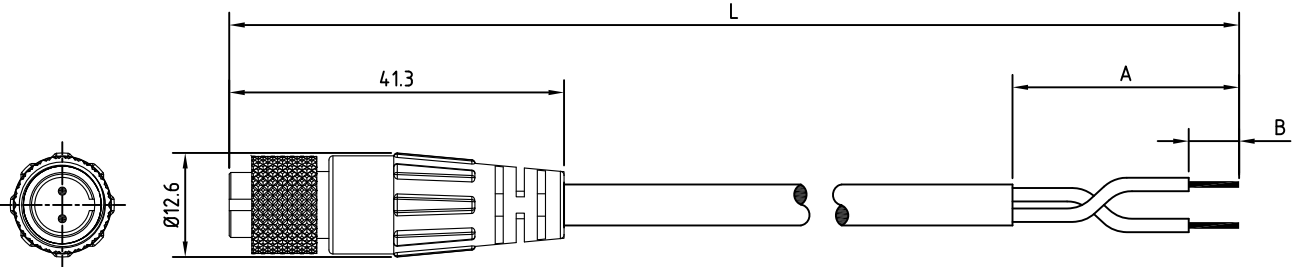

RoHS  
LEAD FREE

CONTACT ARRANGEMENT FRONT VIEW		
	D215M1-XP	2P

 www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25		DATE	10-21-2010	PART NO.	D215M1
		DWN	GINA	REV.	0
		CHK	KATY		
ITEM	SENSOR CONNECTOR M105		UNIT	MM	

NOTE: REV.0 NEW