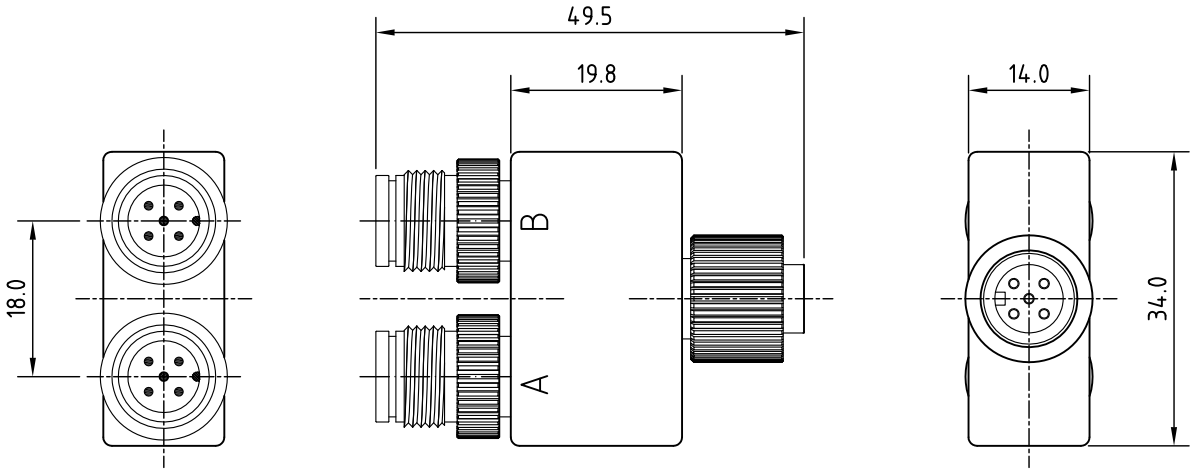

Specification of connector

General Characteristics

Locking system	: screw M12
Shell protection	: IP68

Electronical Characteristics

Rated voltage	: 250V
Rated current	: 5A(2~5PIN) 2A(6~8PIN)
Contact resistance	: ≦10mΩ
Insulation resistance	: >10M Ω

Materials

Pin contact	: brass
Contact plating	: gold
Male insert	: PA
Female insert	: PA
Ring nut	: chromium plated
O-ring	: rubber

RoHS

LEAD FREE

TOLERANCE .X±0.25 .XX±0.10

CONTACT ARRANGEMENT FRONT VIEW (MALE)	2P	3P	4P	5P	6P	7P	8P
CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P	3P	4P	5P	6P	7P	8P

AllConnectors
www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DATE	06/23/2011	PART NO.	D230-4-XP
DWN	GINA	REV.	0
CHK			
ITEM	M12 A-Coded Socket	UNIT	MM