

REV.	Description	Date
1	spec. revise	2012/11/12
2	upgrade drawing	2014/3/17

## Specification of connector

### General Characteristics


Locking system	: screw M15.5
Termination	: solder
Shell protection	: IP68
Contact resistance	: $\leq 10\text{m}\Omega$
Insulation resistance	: $\geq 10\text{M}\Omega$

### Materials

Socket contact	: brass
Contact plating	: gold
Female insert	: PA
Ring nut	: PA
O-ring	: rubber

## Specification of cable

Material Jacket	PVC	PUR

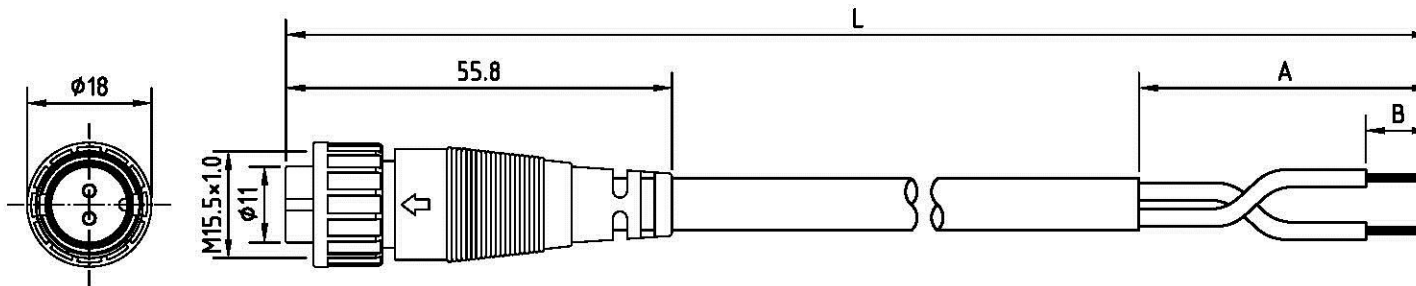

RoHS  
LEAD FREE

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P	3P	4AP	4BP	5P	6P	7P	8P	10P	12P
Rated voltage	250V			250V	125V			60V		
Rated current	10A			5A			2A			

**Allconnectors**  
[www.allconnectors.de](http://www.allconnectors.de)  
 Tel.: 0049 711 7009503  
 70794 Filderstadt - Germany

info@allconnectors.de  
 Fax: 0049 711 7009504  
 Kettenerstr. 25

DATE	2014/3/17	PART NO.	UT-D210F4-1-XP
DWN	GINA	REV.	2
CHK			
UNIT	MM		

ITEM	Sensor Connector M15.5
------	------------------------