

REV.	Description	Date

### Specification of connector

#### General Characteristics


- Locking system : screw M15.5
- Termination : solder
- Shell protection : IP68
- Contact resistance :  $\leq 10\text{m}\Omega$
- Insulation resistance :  $\geq 10\text{M}\Omega$

#### Materials

- Pin contact : brass
- Contact plating : gold
- Male insert : PA
- Ring nut : PA
- O-ring : rubber

### Specification of cable

Material Jacket	PVC	PUR

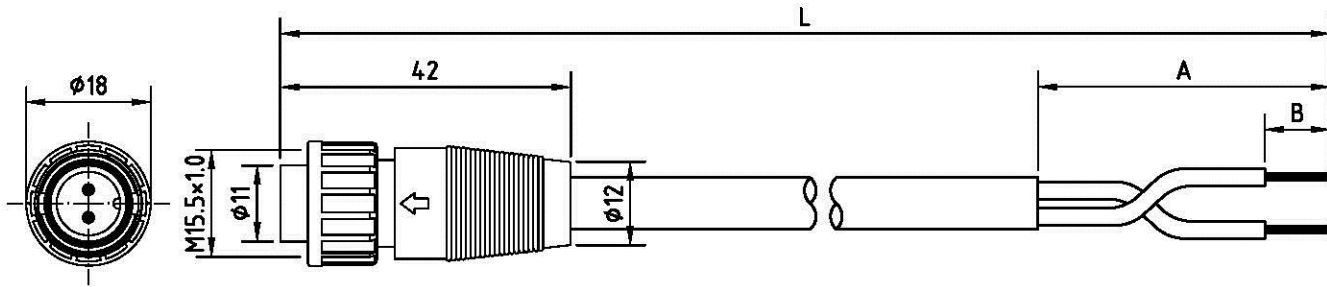

RoHS  
LEAD FREE

CONTACT ARRANGEMENT FRONT VIEW (MALE)		
	2P	3P
Rated voltage	250V	
Rated current	10A	

**Allconnectors**  
[www.allconnectors.de](http://www.allconnectors.de)  
 Tel.: 0049 711 7009503  
 70794 Filderstadt - Germany

info@allconnectors.de  
 Fax: 0049 711 7009504  
 Kettnerstr. 25

ITEM	Sensor Connector M15.5
------	------------------------

DATE	2014/3/13	PART NO.	UT-D210M3-1-XP
DWN	GINA	REV.	0
CHK			
UNIT	MM		