

REV.	Description	Date

### Specification of connector

#### General Characteristics

- Locking system : push & lock
- Termination : solder
- Shell protection : IP67

#### Electrical Characteristics


- Rated voltage : 360V
- Rated current : 25A(2~3PIN)
- : 16A(4~6PIN)
- : 10A(7~8PIN)
- : 25A/5A(2+8PIN)

#### Materials

- Socket contact : brass
- Contact plating : nickel
- Female insert : PA
- Ring nut : PA
- O ring : rubber

### Specification of cable

Material Jacket	PVC	PUR

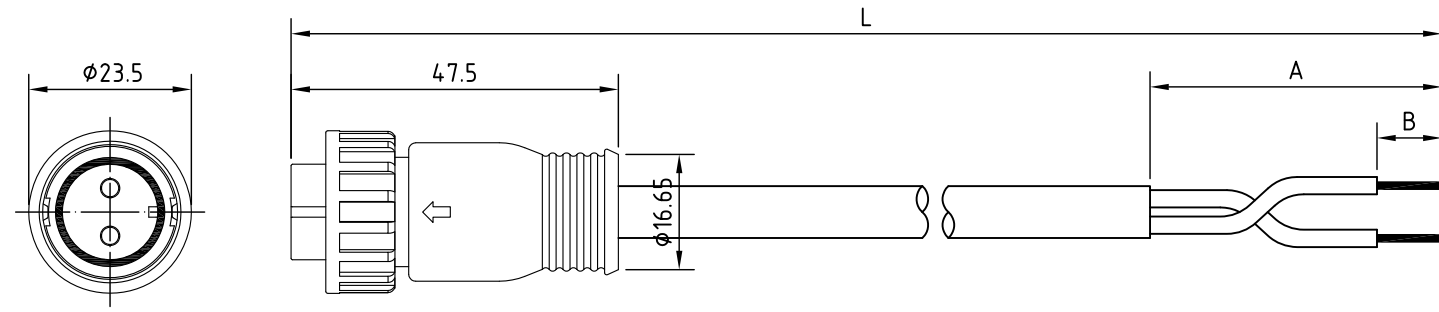

RoHS  
LEAD FREE

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P	3P	4P	5P	6P	7P	8P	2+8P

**All Connectors**  
[www.allconnectors.eu](http://www.allconnectors.eu) | [info@allconnectors.eu](mailto:info@allconnectors.eu)  
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DATE	3/23/2012	PART NO.	D264F3-XP
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M20.5
------	------------------------