


REV.	Description	Date
1	add 3~8PIN arrangement	2012/3/23

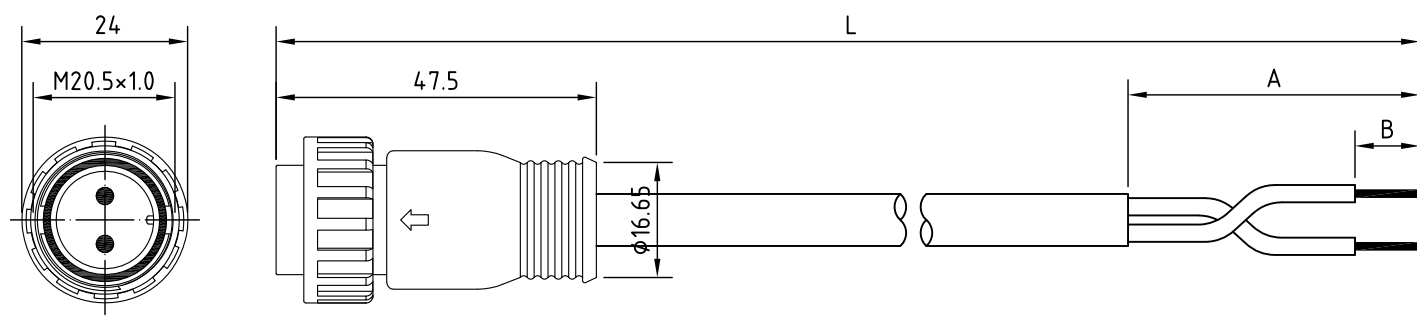

Specification of connector

General Characteristics

- Locking system : screw M20.5
- Termination : solder
- Shell protection : IP68

Electrical Characteristics

- Rated voltage : 360V
- Rated current : 25A(2~3PIN)
- : 16A(4~6PIN)
- : 10A(7~8PIN)
- : 25A/5A(2+8PIN)

Materials

- Pin contact : brass
- Contact plating : nickel
- Male insert : PA
- Ring nut : PA
- O ring : rubber

Specification of cable

Material Jacket	PVC	PUR
-----------------	-----	-----

RoHS
LEAD FREE

CONTACT ARRANGEMENT FRONT VIEW (MALE)	2P	3P	4P	5P	6P	7P	8P	2+8P

Allconnectors
www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DATE	3/23/2012	PART NO.	D264M1-XP
DWN	GINA	REV.	1
CHK			
UNIT	MM		

ITEM	Sensor Connector M20.5
------	------------------------