


REV.	Description	Date

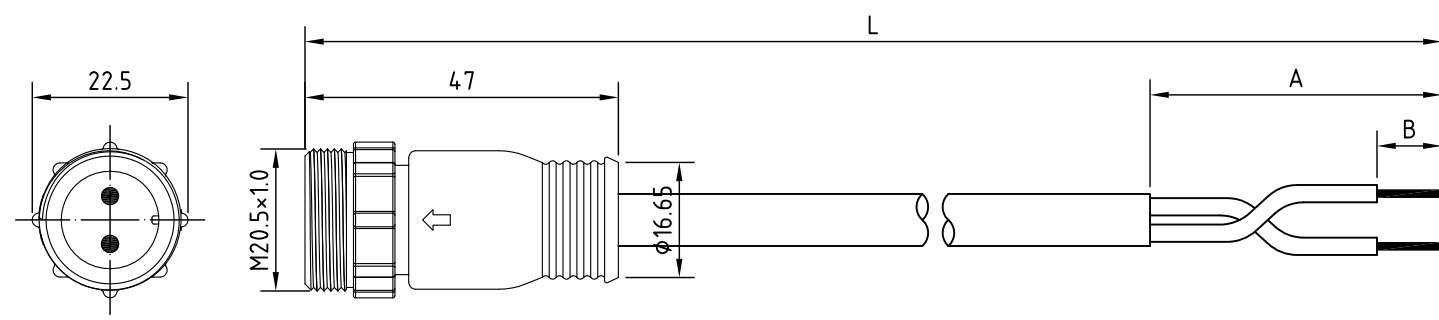

Specification of connector

General Characteristics
 Locking system : screw M20.5
 Termination : solder
 Shell protection : IP68

Electrical Characteristics
 Rated voltage : 400V
 Rated current : 25A(2~3PIN)
 : 16A(4~6PIN)
 : 10A(7~8PIN)
 : 25A/5A(2+8PIN)

Materials
 Pin contact : brass
 Contact plating : nickel
 Male insert : PA

Specification of cable

Material Jacket	PVC	PUR
-----------------	-----	-----

RoHS
 LEAD FREE

CONTACT ARRANGEMENT FRONT VIEW (MALE)								
	2P	3P	4P	5P	6P	7P	8P	2+8P

All Connectors
 www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DATE	3/23/2012	PART NO.	D264M2-XP
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M20.5
------	------------------------