


| REV. | Description | Date |
|------|-------------|------|
| | | |

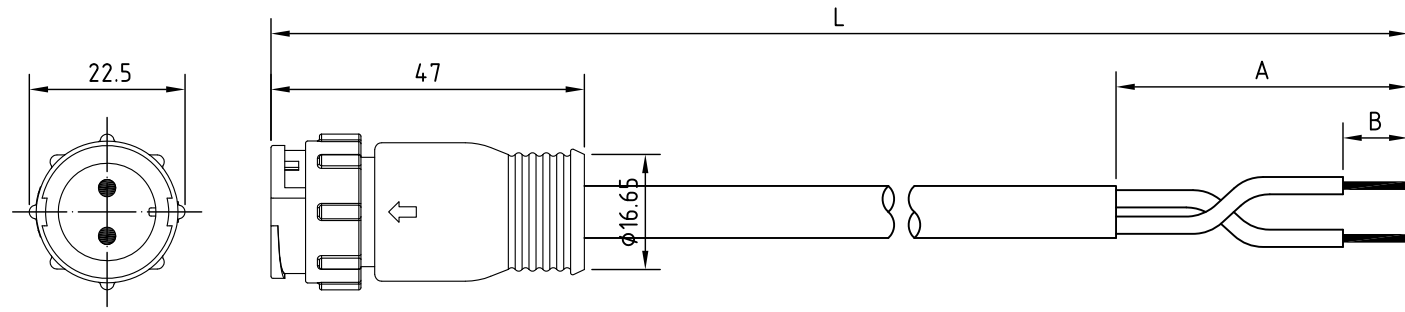

Specification of connector

General Characteristics

- Locking system : push & lock
- Termination : solder
- Shell protection : IP67

Electrical Characteristics

- Rated voltage : 360V
- Rated current : 25A(2~3PIN)
- : 16A(4~6PIN)
- : 10A(7~8PIN)
- : 25A/5A(2+8PIN)

Materials

- Pin contact : brass
- Contact plating : nickel
- Male insert : PA

Specification of cable

| | | |
|-----------------|-----|-----|
| Material Jacket | PVC | PUR |
|-----------------|-----|-----|

RoHS
LEAD FREE

| CONTACT ARRANGEMENT FRONT VIEW (MALE) | 2P | 3P | 4P | 5P | 6P | 7P | 8P | 2+8P |
|---------------------------------------|----|----|----|----|----|----|----|------|
| | | | | | | | | |

All Connectors
www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

| | | | |
|------|-----------|----------|-----------|
| DATE | 3/23/2012 | PART NO. | D264M4-XP |
| DWN | GINA | REV. | 0 |
| CHK | | | |
| UNIT | MM | | |

| | |
|------|------------------------|
| ITEM | Sensor Connector M20.5 |
|------|------------------------|