
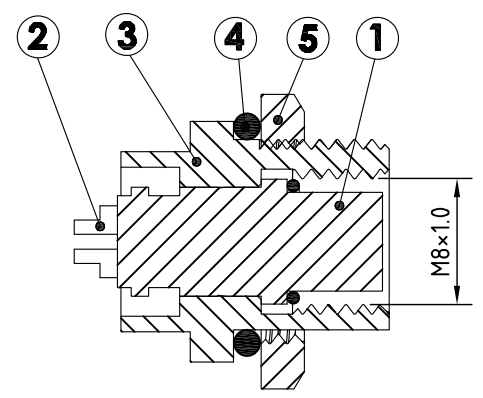



REV.	Description	Date
1	upgrade drawing	2011/9/20

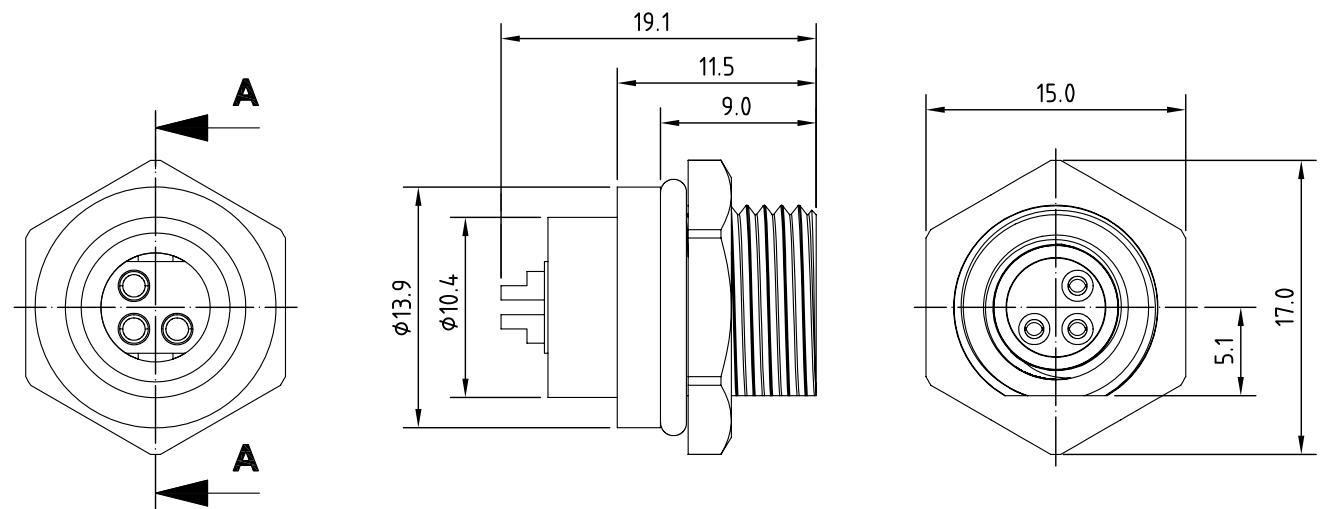

Specification:
 Current: 4A
 Operation temperature: -20°C to 105°C
 Insulation resistance: 1000M Ω min,
 Dielectric strength: 500V AC min.

Waterproof test:
 Reference to IEC 60529 Edition
 2.1:2001-02-IP67

RoHS
 LEAD FREE
 TOLERANCE .X \pm 0.25 .XX \pm 0.10

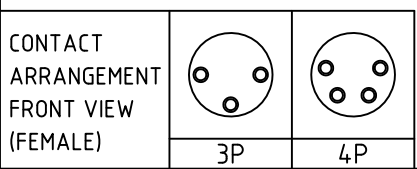

SECTION A-A

5	Nut	Brass	Nickel plated
4	O ring	Rubber	
3	Body	Brass	Nickel plated
2	Pin	Brass	Gold plated
1	Housing	PA	UL94V-0
Item	Description	Material	Treat & Remark

All Connectors

www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DATE	9/20/2011	PART NO.	SP205M-XP
DWN	GINA	REV.	1
CHK			
UNIT	MM		

ITEM	Sensor Connector M8
------	---------------------