


REV.	DESCRIPTION	DATE
A	ISSUE	Apr/04/2012

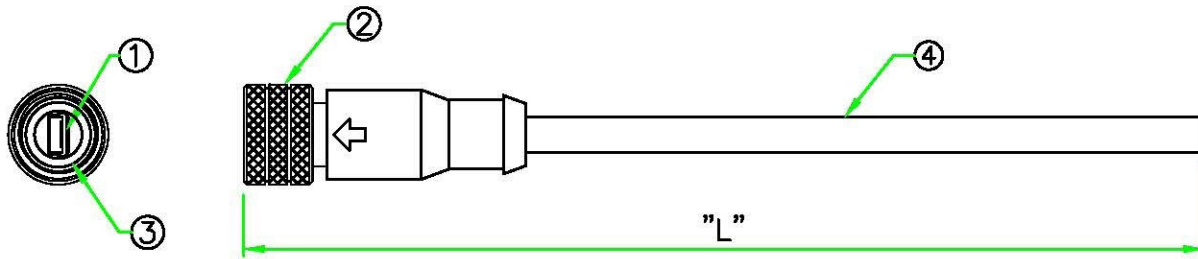

**Specification:**

1. Current rating : 1A Max.
2. Dielectric withstanding voltage : 500V(AC) for 1 minute.
3. Contact resistance : 30mW Max.
4. Insulation resistance : 1000MW Min. at DC 500V.
5. Temperature range : -20°C ~ +80°C.
6. IP rate : IP 66 ~ IP68.

**HOW TO ORDER:**

**MUB-□4□□-xxM**  
 1 2 3 4 5 6

- 1- Mini USB B Type
- 2- M: Metal Ring Nut.  
P: Plastic Ring Nut.
- 3- 4: Female Connector Male Plug.
- 4- S: Straight Angle. R: Right Angle.
- 5- N: w/o SR. M: w/SR.
- 6- Length. (01M=1M,.....)

**RoHS**

Wiring Diagram		Pin Assignment Front View (前視圖)
1	RED (紅)	
2	WHITE (白)	
3	GREEN (綠)	
4	NC	
5	BLACK (黑)	
Shell	BRAID (編織)	

MUB-5M



No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS	REV.	SHEET	DWG.NO:	AP.
4	CABLE	USB 2.0 28AWGx2C+20AWGx2C, Jacket Black PVC, OD: 5.2mm.	BLACK	1		UNIT: mm	1/1	TITLE	DR. <i>jaek</i>
3	O-RING	NBR .	BLACK	1	O-5618-N70	SCALE	1:1		CH. <i>ERJE</i>
2	RING NUT	BRASS, NICKEL PLATED.		1	M12F-RN	UNLESS OTHERWISE SPECIFIED TOLERANCES:		P/N:	
1	CONNECTOR	MINI USB B TYPE MALE 5 Pin Connector.	BLACK	1		x ±0.25 xx ±0.1 xxx ±0.05 ANGLE ±1°x		MUB-M4SN-xxM	
						REV.		MUB-M4SN-xxM	