

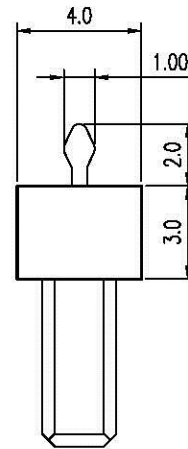


REV.	DESCRIPTION	ECN NO.	DATE	DRAWER
A	New Release		12/12/2005	Tom

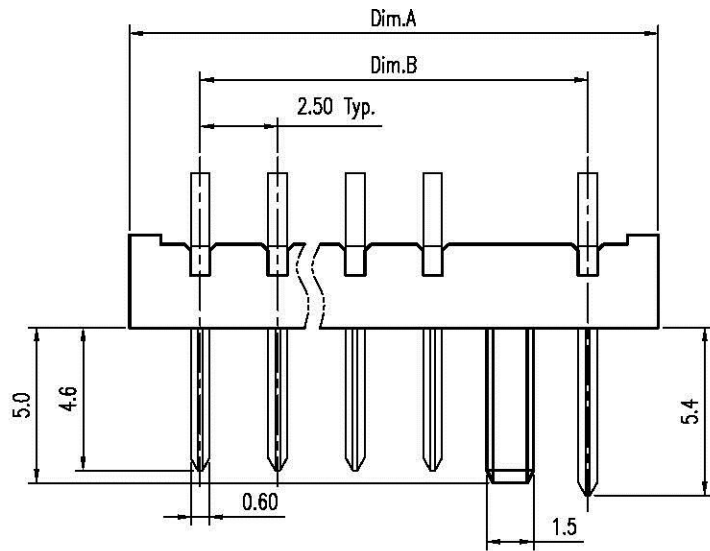

**Notes:**

- Material :  
Housing : Thermoplastic UL 94V-0  
Terminal : Copper Alloy
- Finish :  
Terminal : Selected Gold on Contact Area,  
Flash on Solder Tails, Both Over  
50u" Min. Ni Under-plated Overall
- Order Information :  
TSB1-052 X 1-08T X

**Amount of Pins**

3 : 3 Pins

s

9 : 9 Pins

A : 10 Pins

**Plating**

2 : 2u" Min. Gold on Contact Area

Gold Flash on Solder Tails

3 : 5u" Min. Gold on Contact Area


Gold Flash on Solder Tails

8 : 30u" Min. Gold on Contact Area

Gold Flash on Solder Tails

**Dimension Information:**

Part No.	Dim.	Amount of Pins	Dim.A	Dim.B
TSB1-05231-08TX	3	3	12.05	7.5
TSB1-05241-08TX	4	4	14.55	10.0
TSB1-05251-08TX	5	5	17.05	12.5
TSB1-05261-08TX	6	6	19.55	15.0
TSB1-05271-08TX	7	7	22.05	17.5
TSB1-05281-08TX	8	8	24.55	20.0
TSB1-05291-08TX	9	9	27.05	22.5
TSB1-052A1-08TX	10	10	29.55	25.0

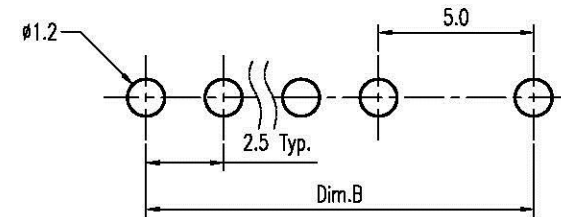

**Recommended P.C.B. Layout**  
Layout Tolerance = ± 0.05 mm

DIMENSION IN mm [inch]	
Tolerance unless otherwise specified	
X. ± 0.38	X.' ± 10'
X.X ± 0.25	X.X' ± 5'
X.XX ± 0.13	X.XX' ± 2'
X.XXX ±	X.XXX' ±

**All Connectors**

www.allconnectors.de info@allconnectors.de  
Tel.: 0049 711 2005900 Fax: 0049 711 2005910  
20791 Tüdingen - Germany Kette Markt 25

**CUSTOMER DRAWING**

Approver:

Checker:


Drawer: Tom

12/12/2005

Title 2.5mm Pitch Battery Conn.  
Male Type

Dwg No. TSB1-052X1-08TX

File No. N/A



Scale: 4 : 1

Size: A 4

Rev : A

Sheet: 1 / 1