

Note:

1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.20mm
- 1.3 Shell: Spcc,t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mW Max.
- 2.4 Insulation resistance: 1000 MW Min.
- 2.5 Total mating force: 7.0 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55°C~85°C

PART NO.	A±0.25	B±0.2	C±0.2	D±0.2	E±0.2	I±0.1
DRM-PG-09	30.81	24.99	16.92	8.38	12.55	2.84
DRM-PG-15	39.25	33.32	25.25	8.38	12.55	2.84
DRM-PG-25	53.04	47.04	38.96	8.38	12.55	2.84
DRM-PG-37	69.32	63.50	55.42	8.38	12.55	2.84

All Connectors


www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettenerstr. 25

RoHS Compliant


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/mm SCALE 1:1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE

X ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±



ORDER INFORMATION

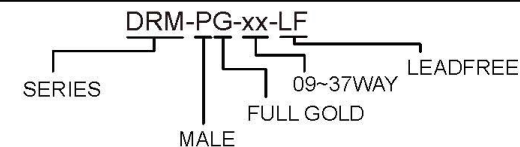

DESCRIPTION: D-SUB RIGHT ANGLE P.C.B. TYPE (M) 9.4