


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 NYLON-6T
 All materials must meet Greenconn requirement for environment protection

Recommended P.C.B. Layout

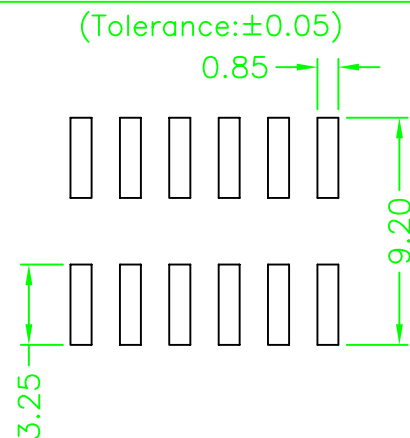

Ordering Information

HFLDSV6E - XX XX XXX T W X

No. of Pins Per Row 02-25	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	Pin Length 001=8.3 XXX=Select W	Material L=LCP T=NL6T	Post P=With Post W=Without Post	Packing TR=Tape+Reel T=Tube
---------------------------------	---	---------------------------------------	-----------------------------	---------------------------------------	-----------------------------------

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
.X ± 0.38 .XX ± 0.25 .XXX ± 0.13	X' ± 5° .X' ± 2° .XX' ± 1° .XXX' ± 0.5°	Andy2005.08.12		
UNIT:mm	SCALE 1:1	APPRO. DATE	FILE NAME (品名)	2.0MM Female Header SMT TYPE
A4	SHEET: 1 of 1		PART NO (料号)	HFLDSV6E-XXXXXXXXTWX
			DRAWING NO.(图号)	HFLDSV6E-05
			REV.	AO