

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0

All materials must meet Greenconn requirement for environment protection
 Nylon 6T(Processing temp.260°C,10sec)

acetate tape	NOTE
5.1mm	02~08PIN
10mm	09~40PIN

RECOMMENDED P.C.B LAYOUT


(Tolerance: ±0.05)

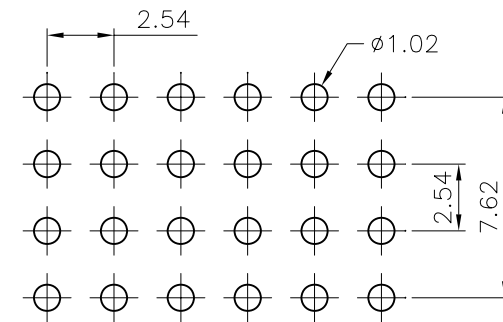

Ordering Information

HFNDS79 - XX XX XXX T X

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Pin, XX=Select Plating
 Pin Length: 001=3.0/7.62, XXX=Select A/W
 Material: L=LCP, T=NL6T
 Packing: TR=Tape+Reel, T=Tube

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ±	X' ±5°	Andy2005.08.12			
.X ±0.38	.X' ±2°	CHECK	DATE	FILE NAME (品名)	2.54MM Female Header SMT TYPE
.XX ±0.25	.XX' ±1°	APPRO.	DATE	PART NO (料号)	HFNDS79-XXXXXXXTBX
.XXX ±0.13	.XXX' ±0.5°			DRAWING NO.(图号)	HFNDS79-05
UNIT:mm	SCALE 1:1				REV.A0
A4	SHEET: 1 of 1				