

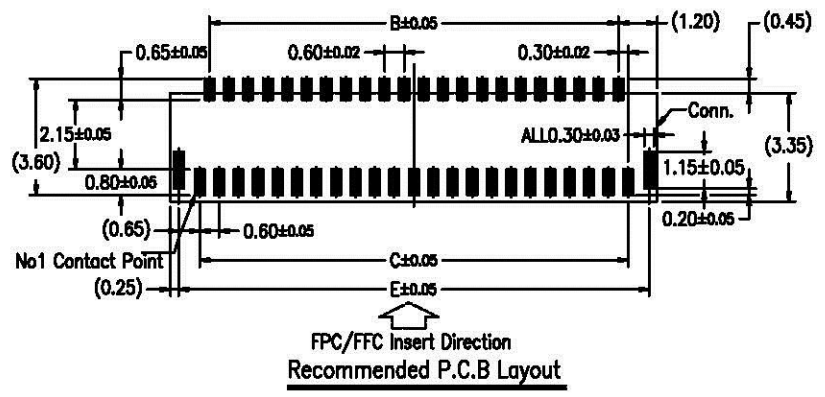
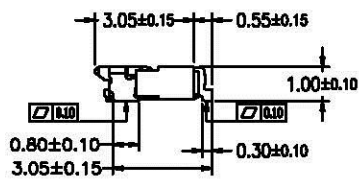
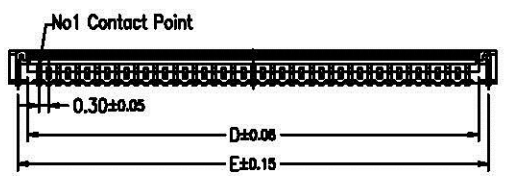





REV.	DATE	ECN NO.	MODIFICATION	APPROVER
A	2011/11/02	/	NEW	Vicky

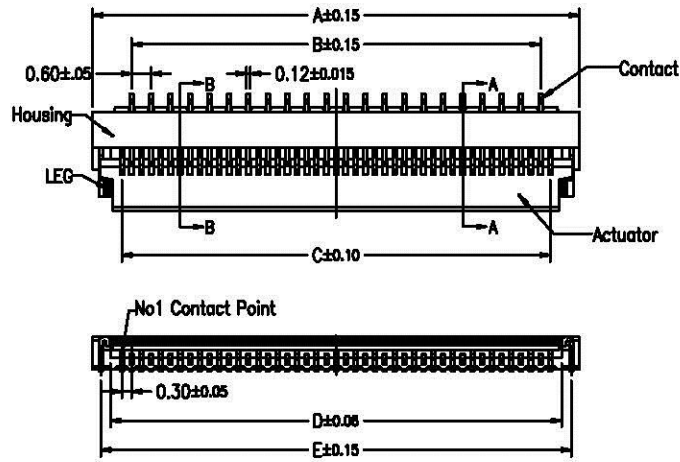

- Note:
- Material
    - 1.1: Housing: LCP UL94-V0 Color:Black.
    - 1.2: Cover: LCP UL94-V0 Color:Black.
    - 1.3: Contact: Phosphor Bronze.
    - 1.4: LEG: Phosphor Bronze.
  - Plating
    - 2.1: Contact: Gold plated
    - 2.2: LEG: Matte Tin Plating Over Nickel.
  - Rating:
    - 3.1: Operating Voltage: 30V AC/DC.
    - 3.2: Current Rating: 0.2A AC/DC.
    - 3.3: Operating Temperature: -55°C~+85°C.

PIN NO.	A	B	C	D	E
13	5.40	3.00	3.60	4.30	4.90
15	6.00	3.60	4.20	4.90	5.50
17	6.60	4.20	4.80	5.50	6.10
19	7.20	4.80	5.40	6.10	6.70
21	7.80	5.40	6.00	6.70	7.30
23	8.40	6.00	6.60	7.30	7.90
25	9.00	6.60	7.20	7.90	8.50
27	9.60	7.20	7.80	8.50	9.10
29	10.20	7.80	8.40	9.10	9.70
31	10.80	8.40	9.00	9.70	10.30
33	11.40	9.00	9.60	10.30	10.90
35	12.00	9.60	10.20	10.90	11.50
37	12.60	10.20	10.80	11.50	12.10
39	13.20	10.80	11.40	12.10	12.70
41	13.80	11.40	12.00	12.70	13.30
45	15.00	12.60	13.20	13.90	14.50
49	16.20	13.80	14.40	15.10	15.70
51	16.80	14.40	15.00	15.70	16.30
57	18.60	16.20	16.80	17.50	18.10
61	19.80	17.40	18.00	18.70	19.30
67	21.60	19.20	19.80	20.50	21.10
71	22.80	20.40	21.00	21.70	22.30

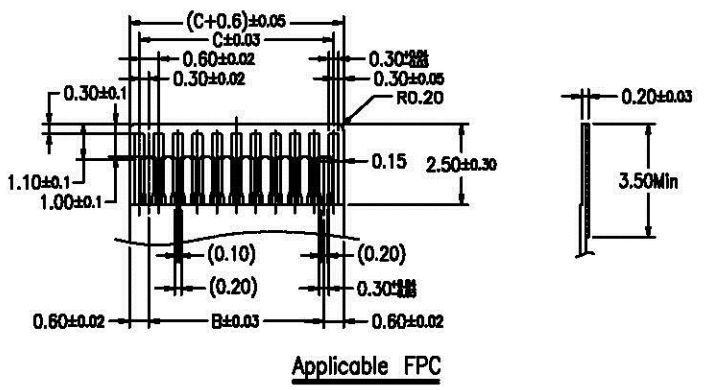

GENERAL TOLERANCE			UNITS	NAME:	FPC	Allconnectors		
SELECT	✓		mrr	PART NO:	FPC030**-14***	TITLE: FPC0.3mm XP SMT H=1.0mm 掀盖式		
ON.	TOL	1 2 3	MAT'L	APPD:	Vicky	DWG NO. ATOM-A00137		
X.XXX	±0.10	±0.05 ±0.15	FINISH	CHKD:	Ivy	SCALE SHEET REV		
X.XX	±0.20	±0.13 ±0.25	Q'TY	DR:	Iris	1:1 1/1 A		
X.X	±0.25	±0.25 ±0.50						
X		±0.38 ±1.00						
ANGLE								