



.205" Series Nylon-insulated Female Terminal

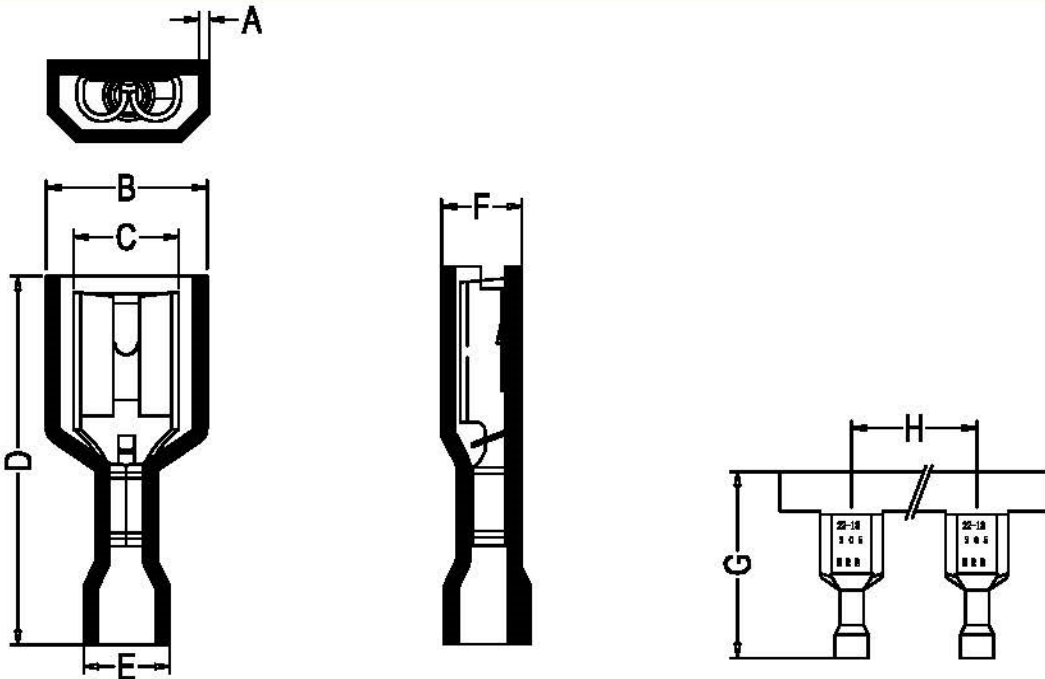

SPECIFICATIONS:

- Current Rating: AWG#22~#18:10A AC,DC
AWG#16~#14:15A AC,DC
- Voltage Rating:300V AC,DC
- Operating Temperature:-25℃~+105℃
- Material:Housing:Nylon66 UL 94V-2
Terminal:Brass.Tin-plated
- Tab Size:5.21x0.80mm Or 5.21x0.50mm
- The Insertion Force And Male Terminal:7.8kg (max.)
- The withdrawal Force And Male Terminal:3.0kg (Min.)
- Crimp tensile strength:AWG#22~#18:5.0kg (Min.)
AWG#16~#14:10.0kg (Min.)
- cULus File No:E322751

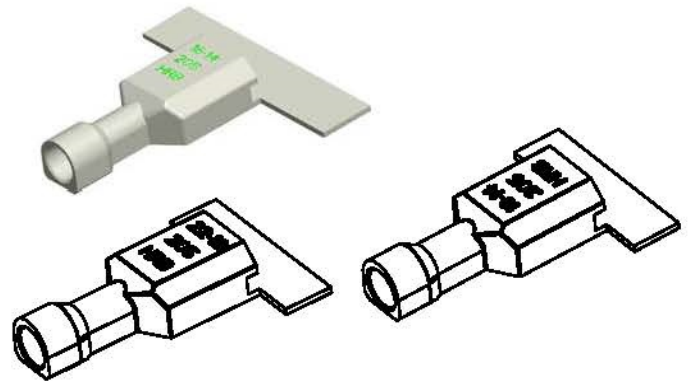

Ordering Information And Dimensions

	Part NO.	A	B	C	D	E	F	G	H	Wire Size	Ins.Dia.max
205#	M6350FN(S)-2(5)-R	0.75	9.75	6.50	21.80	5.30	5.00	28.20	18.85	AWG#22~#18	3.05mm
	M6350FN(S)-2(5)-b	0.75	9.75	6.50	21.80	6.10	5.00	28.20	18.85	AWG#16~#14	4.06mm
	M6350FN(S)-2(8)-R	0.75	9.75	6.50	21.80	5.30	5.00	28.20	18.85	AWG#22~#18	3.05mm
	M6350FN(S)-2(8)-b	0.75	9.75	6.50	21.80	6.10	5.00	28.20	18.85	AWG#16~#14	4.06mm

