

0.60mm .024" Center Wire to Board Connector

AllConnectors

ALL CONNECTORS INC.
10001 W. 10th Ave.
DENVER, CO 80231

PH: 303.440.2200
FAX: 303.440.2202
WWW.AC-CONNECTORS.COM

0600 Series

■ PLUG HOUSING

Part No.: 0600-21-xxP

Specifications

Electrical

Voltage Rating: 30V(AC, DC)
Current Rating: 0.3A AC/ DC(AWG#34)
0.2A AC/ DC(AWG#36)

Withstanding Voltage: 200V AC/minute
Insulation Resistance: 100MΩ Min
Contact Resistance: 40mΩ Max
Insulation O.D: 0.29mm(AWG#36)
0.32mm(AWG#34)

Applicable Wire: AWG#36, AWG#34




Material

Circuits: 6

Housing: LCP, UL 94V-0

Terminal: Phos Bronze, Tin plated
Gold plated

Temperature Range: -25~+85°C

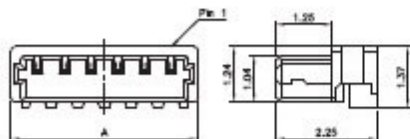

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
6	0600-21-xxP	4.20	3.00

0601 Series

■ PLUG HOUSING

Part No.: 0601-21-xxP

Specifications

Electrical

Voltage Rating: 30V(AC, DC)
Current Rating: 0.3A AC/ DC(AWG#34)
0.2A AC/ DC(AWG#36)

Contact Resistance: 40mΩ Max
Withstanding Voltage: 200V AC/minute
Insulation Resistance: 100MΩ Min
Insulation O.D: 0.29mm(AWG#36)
0.32mm(AWG#34)

Applicable Wire: AWG#36, AWG#34




Material

Circuits: 6

Housing: LCP, UL 94V-0

Terminal: Phos Bronze, Tin plated
Gold plated

Temperature Range: -25~+85°C

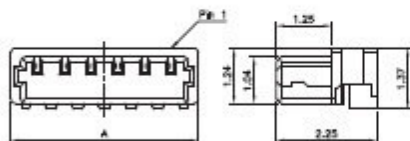

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
4	0601-21-04P	3.00	1.80
6	0601-21-06P	4.20	3.00
8	0601-21-08P	5.40	4.20
10	0601-21-10P	6.60	5.40
12	0601-21-12P	7.80	6.60