# 10.00mm(.400") Wire To Wire And Wire To Board Connector

HRB®
Connector & Terminal

SPECIFICATIONS:

- Current Rating:AWG#8:48A AC,DC AWG#10:40A AC,DC
  AWG#12: 32A AC,DC AWG#14: 25A AC,DC
  AWG#16: 20A AC,DC
- Voltage Rating:600V AC,DC
- Contact Resistance:20mΩ max.
- Withstanding Voltage:1000V AC/minute
- Part NO:T9910PS-2
- Part NO:T9910PS-00(Gold Plated)
- Part NO:T9910PS-15U(15U Gold Plated)
- Part NO:T9910PS-30U(30U Gold Plated)
- Function Of Local Gold-plated
- Material: Copper Alloy
- Wire Size:AWG#8~#16
- Use With:P9910-N
- GWT:750℃ IEC-60335-1

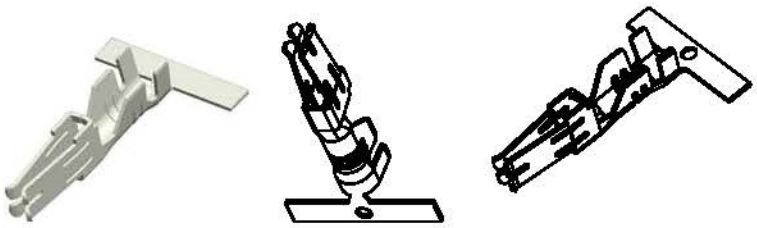

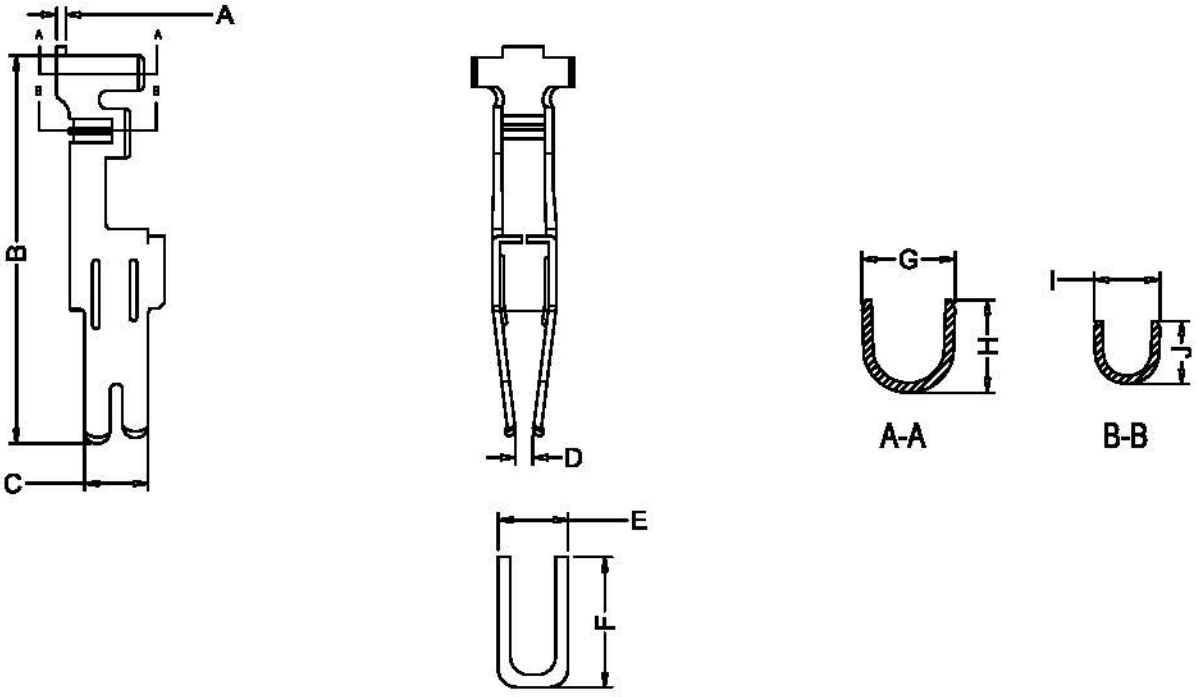


Ordering Information And Dimensions

| Part NO. | A | B | C | D | E | F | G | H | I | J | Applicable Wire | Q'ty |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| T9910PS-2 | 0.50 | 27.60 | 4.80 | 1.00 | 3.80 | 7.10 | 5.94 | 5.69 | 3.80 | 3.92 | AWG#14~#16 | 1500PCS |
| T9910PS-2A | 0.50 | 27.60 | 4.80 | 1.00 | 3.80 | 7.10 | 5.90 | 6.60 | 5.40 | 6.10 | AWG#8~#12 | 1500PCS |

PART CODE INFORMATION

XXXXX XX - X

I II III

I-T9910 Denoting series designation.

II-PS denoting Copper Alloy of body

III-2 or 2A,Denoting different of body construction

ISO 9001 UKAS

E304945

E322751

SGS

All Connectors
www.allconnectors.de
70794 Filderstadt - Germany
info@allconnectors.de
Fax: 0049 /11 /009504
Kettemerstr. 25