

REV.	ECN.NO	REVISIONS	REV.DRAWN	DATE
A	---			2010/05/08
B	---			2010/05/12
C	---			2010/07/07

**SPECIFICATION**


- . Voltage Rating : 3000V AC/DC
- . Current Rating : 1A AC/DC
- . Withstanding Voltage : 5000V AC/Minute
- . Insulation Resistance : 1000MΩ Min.
- . Temperature Range : -25°C~+85°C
- . Contact Resistance : 10mΩ Max.

**NOTES:**


1. MATERIAL:  
 BASE: HIGH TEMP. THERMOPLASTIC, UL94V-0; COLOR:NATURE&BLACK  
 CONTACT: COPPER ALLOY, MATTE TIN  
 SOLDER TAB: COPPER ALLOY, MATTE TIN
2. MATE WITH. (HOUSING) UNDEVELOPED
3. Q'TY: 30PCS/TUBE
4. PART NO.  
 JS-20131D3-02XX-XX-XX

\_\_\_\_\_ BLANK: NORMAL  
 \_\_\_\_\_ NH: HALOGEN FREE  
 \_\_\_\_\_ BLANK: NATURE  
 \_\_\_\_\_ BK: BLACK  
 \_\_\_\_\_ M: MATTE TIN  
 \_\_\_\_\_ POLES: 02

5. Halogen free product identification LOGO on the packing

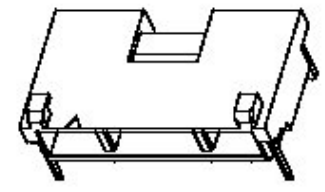

ISOMETRIC VIEW

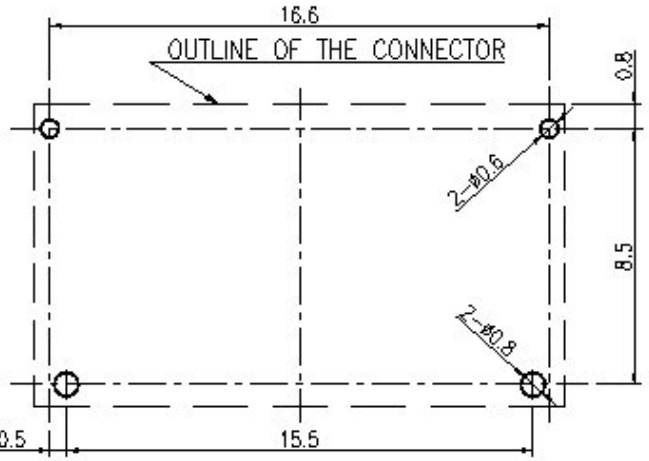

Recommended PCB Layout  
(UNLESS SPECIFIED DIMENSION TOLERANCE=±0.05)

x ±0.40	x' ±5.0'	UNITS	MM	NAME(INTENDED USE)	All Connectors www.allconnectors.eu   info@allconnectors.eu Tel: +49 (0)711 / 358 110 20   Fax: +49 (0)711 / 358 110 25		
.X ±0.30	.X' ±3.0'	MAT'S		CUSTOMER			
.XX ±0.20	---	SEE NOTE		PART NO.(INTENDED USE)	TITLE: 13.0mm PITCH HEADER DIP-TYPE (RIGHT ANGLE)		
---	---	FINISH		JS-20131D3-02			
<small>THESE DIMENSIONS AND SPECIFICATIONS ARE THE PROPERTY OF SHANN BSHANN ELECTRONIC. OUTLINED SHALL NOT BE REPRODUCED. CHANGES OR USES IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SHANN BSHANN ELECTRONIC DRUITS.</small>				APP'D	kuzhiwan 2010/07/07	DWG NO. 020-0132-20131D3-02	
				CHK'D			
				Q'TY	---		
				DR'	sunquan 2010/05/09		
				SCALE	4 : 1	SHEET	1/1
				REV			B