

Specifications:

Current Rating: 3.0A AC, DC

Voltage Rating: 250V AC, DC

Contact Resistance: 20mohm Max

Insulation Resistance: 1000Mohm Min.

Withstanding Voltage: 1000V AC/minute

Operating Temperature Range: -40°C ~ +105°C


Material and Finish:

Insulator: Nylon 66 (UL94V-0)

Insulator Color: Black


Contact: Brass

Plating: Gold Plated



Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80
11	25.40	27.94			

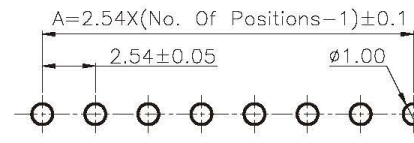

P.C.B. Layout

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT/ mm SCALE 1:1
DATE
SIZE A4


TOLERANCES ARE

X ±
X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PROJECTION



ORDER INFORMATION

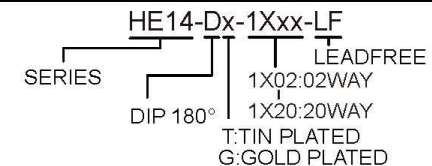

DESCRIPTION: 2.54mm Wire to Board Wafer Single Row Type