

公母对插内部结构图

**NOTE:**

**1.ELECTRICAL PROPERTIES:**

- 1-1.CONTACT CURRENT RATING:1.8A(ONLY PIN1,5) AT THE SAME TIME 0.5A AT CONTACT PIN 2,3,4 OTHER 1A(ONLY PIN2,3 4).
- 1-2.CONTACT RESISTANCE:30m Ohm MAX
- 1-3.INSULATION RESISTANCE:100M Ohm MIN AT DC 500V.
- 1-4.DIELECTRIC WITHSTANDING VOLTAGE:AC 100V AC/1 MINUTE 10mA.

**2.MATERIAL:**





- 2-1.PIN: BRASS
- 2-2.HOUSING: LCP COLOR:BLACK
- 2-3.SHELL: Stainless Steel

**3.PLATING:**

- 3-1.PIN:UNDERPLATED 50u" MIN,NICKEL OVER ALL.  
1u".3u".5u".10u".15u". 30u"GOLD ON CONTACT AREA.  
100u" MIN, TIN ON SOLDER TAILS.

- 3-2. SHELL: 30~80u" ,NICKEL OVER ALL.

- 4.Temperature range: -40°C~+85°C

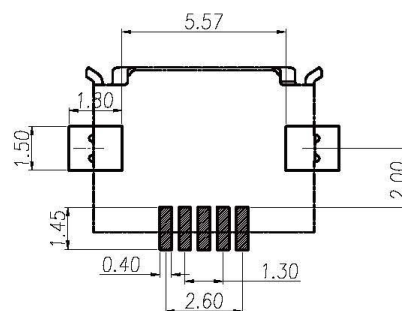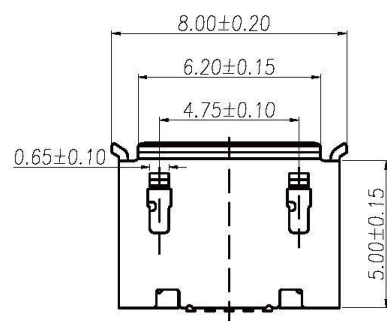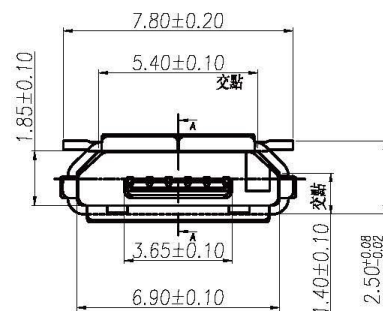

**RECOMMEND P.C.B LAYOUT**

3	SHELL	1	Stainless steel	T=0.30±0.01mm	Nickel Plated	D4470XX
2	CONTACT	5	Brass	T=0.20±0.01mm	Gold Flashfd	
1	HOUSING	1	LCP		Black	
No.	Part Name	Q'ty	Material	Thickness	Finish	Notes

**All Connectors**

www.allconnectors.de  
Tel.: 0049 711 7009503  
70794 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kettnerstr. 25

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1


DATE

SIZE A4

**TOLERANCES ARE**

X ±  
X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION




**ORDER INFORMATION**


**MISB-SWR-5B-LF**

SERIES  
5 PIN B TYPE  
REEL  
90°SMT  
LEADFREE  
FEMALE


**DESCRIPTION: MICRO USB 5PIN(F) B TYPE (无定位柱)**

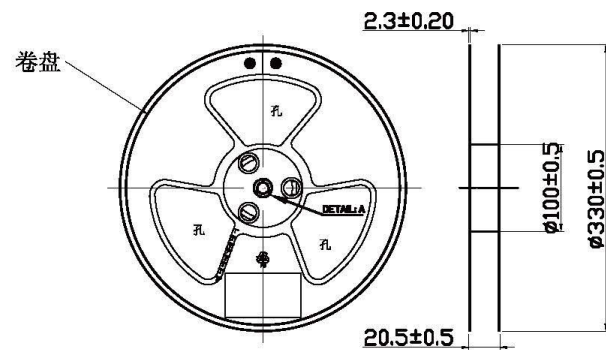


卷帶盤 (圖一)

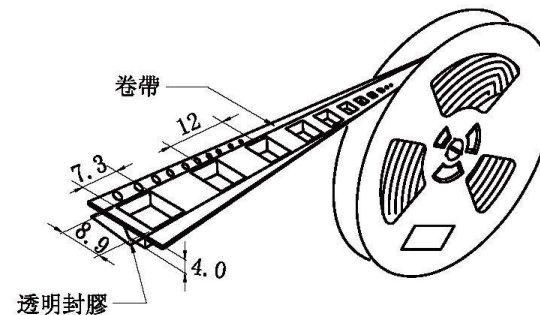


卷裝圖示 (圖二)



未封好  
內紙箱  
(圖三)  
包裝說明

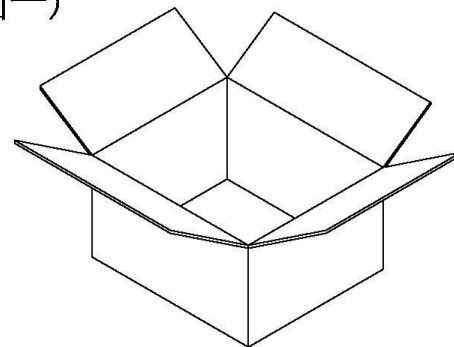

未封好  
外紙箱  
(圖四)

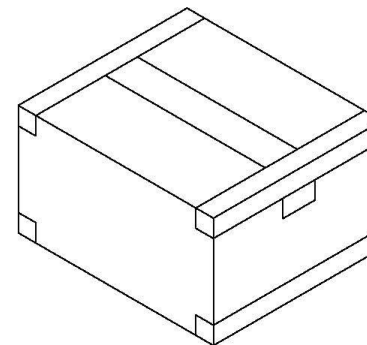

封好外  
紙箱  
(圖五)

1. 每卷帶盤裝1500PCS, 不可少數, 成品在盤內不可活動, 裝好後使用自動卷裝機粘合上透明封膠. 如圖(一, 二)所示. 卷帶盤規格為 $\varnothing 330.0 \times 20.5$ MM.
2. 將裝好的卷帶盤放入內紙箱內, 每個內紙箱放2盤, 用透明膠密封, 再將封裝好的內紙箱放入外紙箱中, 每個外紙箱放8個內紙箱, 共有產品24.0K, 最後用透明膠密封外紙箱. 如圖(三, 四, 五)所示. 內紙箱規格為 $350 \times 350 \times 58$ MM, 外紙箱規格為 $355 \times 368 \times 530$ MM
3. 紙箱外貼上環保标签, 合格标签, 產品規格說明, 並且貼在外箱側面的箱面規格說明的右上方 (僅貼一側)
4. 包裝材料:(JPL007, RR002, ZX011, ZX004)

**All Connectors**

www.allconnectors.de  
Tel.: 0049 711 7009503  
70794 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kettenerstr. 25

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

MISB-SWR-5B-LF

SERIES

REEL

90°SMT

FEMALE

LEADFREE

DESCRIPTION: MICRO USB 5P FEMALE S.M.T  
成品类卷帶包裝规范