

Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP


Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

POLES	DIM E	POLES	DIM E
2	1.27	26	31.75
3	2.54	28	34.29
4	3.81	29	35.56
5	5.08	30	36.83
6	6.35	31	38.10
7	7.62	32	39.37
8	8.89	33	40.64
9	10.16	34	41.91
10	11.43	35	43.18
11	12.70	36	44.45
12	13.97	37	45.72
13	15.24	38	46.99
14	16.51	39	48.26
15	17.78	40	49.53
16	19.05	41	50.80
17	20.32	42	52.07
18	21.59	43	53.34
19	22.86	44	54.61
20	24.13	45	55.88
21	25.40	46	57.15
22	26.67	47	58.42
23	27.94	48	59.69
24	29.21	49	60.96
25	30.48	50	62.23

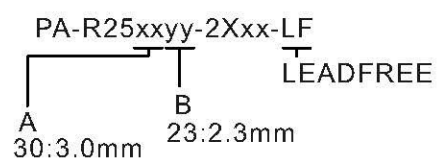

RoHS Compliant

Allconnectors
 www.allconnectors.de
 Tel.: 0049 431 9009903
 30794 Filzschiefel, Germany

PART NO. PA-R25xyyy-2Xxx

DWG NO. PA-R25xyyy-2Xxx

FILE NO.

UNIT / mm

CHECKED BY CY

DRAWING BY

SCALE 1:1

PROJECTION

TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

DESCRIPTION:

AREA

PIN HEADER 1.27*1.27mm

RIGHT ANGLE TYPE, DUAL ROWS

REVISIONS

HK

DATE