


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0 Nylon6T
 All materials must meet Greenconn requirement for environment protection

Recommended P.C.B. Layout

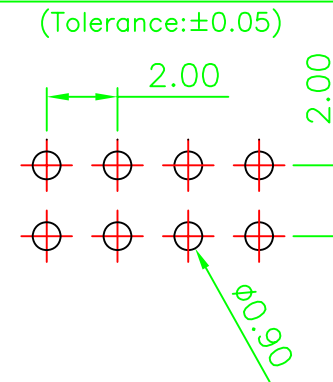

Ordering Information

HMLDS 3 - XX XX XXX T B

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001=4.0 /2.8, XXX=Select A/B
 Material: L=LCP, T=6T, P=PBT
 Material: B=Brass, P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
.X ± 0.38 .XX ± 0.25 .XXX ± 0.13	X' ± 5° .X' ± 2° .XX' ± 1° .XXX' ± 0.5°	Andy2005.08.12		
UNIT:mm	SCALE 1:1	CHECK DATE	FILE NAME (品名)	2.0MM Header Dip TYPE
A4	SHEET: 1 of 1	APPRO. DATE	PART NO (料号)	HMLDS3-XXXXXXXXTB
			DRAWING NO.(图号)	HMLDS3-01
				REV.A0