
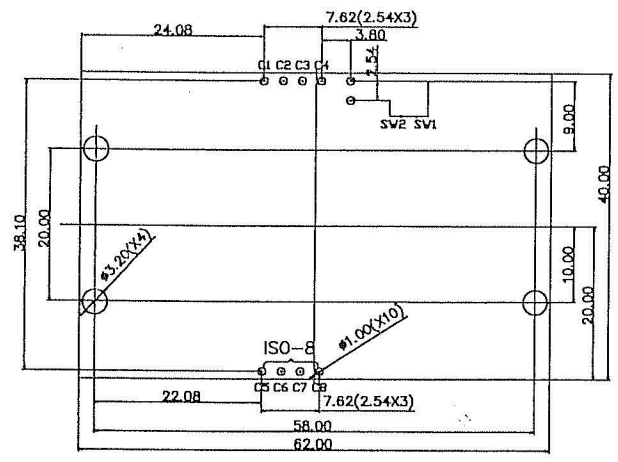
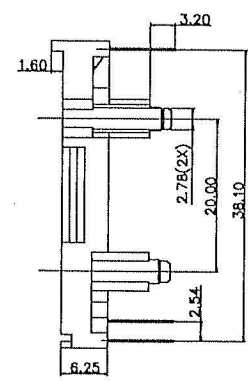
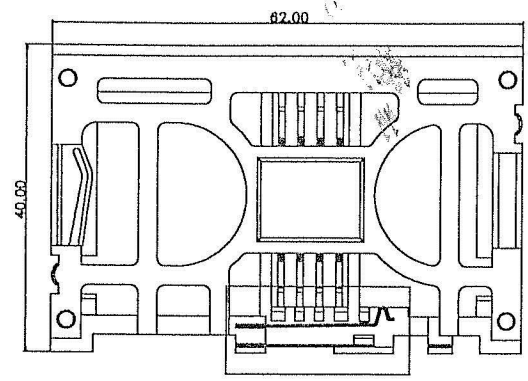



1 2 3 4 5 6 7 8

REV	MODIFICATION	DATE	DRAW

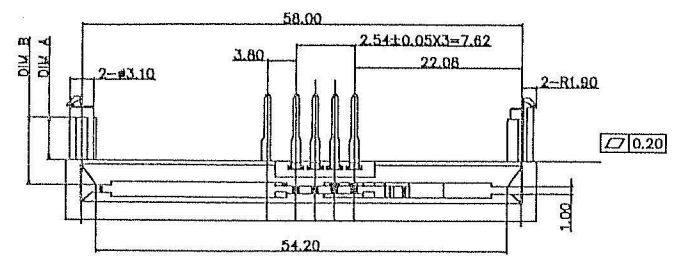

PART NO.	DIM A	DIM B
SMCRB-20801B8190-G	0	3.30
SMCRB-20801B8191-G	3.15	6.45
SMCRB-20801B8192-G	3.50	6.80
SMCRB-20801B8193-G	5.55	8.85

NOTE:

- MATERIAL AND FINISH:
  - A. HOUSING: PBT UL 94-V0 COLOR: BLACK.
  - B. CONTACT: PHOSPHOR BRONZE. SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ON TAIL ZONE(RoHS).
  - C. SWITCH: PHOSPHOR BRONZE.SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ON TAIL ZONE(RoHS).
- READING CONTACT:
  - POSITION: ACCORDING TO ISO 07816-2 C1-C8.
  - CONTACT FORCE: 30-50 GRAM.
- CARD INSERTION SPECIFICATION
  - A. CARD INSERTION DEPTH: 35.5 MM.
  - B. CARD THICKNESS=0.7-0.8 MM.
- DATE CODE: YY MM DD

ORDER INFORMATION:

SMCRB-20801B819 X -G

Stand off  
 0: 0mm  
 1: 3.15mm  
 2: 3.50mm  
 3: 5.55mm

DIMENSION IN mm [Inch]	PROD. SPEC.	Allconnectors	
TOLERANCE UNLESS OTHERWISE SPECIFIED	PKG. SPEC.	www.allconnectors.com	
.X±0.20	X.'± 2'	TITLE SMART CARD CONNECTOR	CUSTOMER DRAWING
.XX±0.15	.X"± 1"	FILE NO.	DWG NO. SMCRB-20801B819X-G
.XXX±0.08	.XX'±	SIZE A4	PROJ. SHEET 1 / 1
		SCALE 1:1	REV A

F  
E  
D  
C  
B  
A

F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8 QR-2100-043